



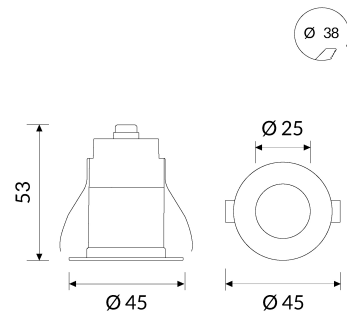

## HALL LED DEEP Mini

Miniaturized downlight for spot lighting. CRI>90

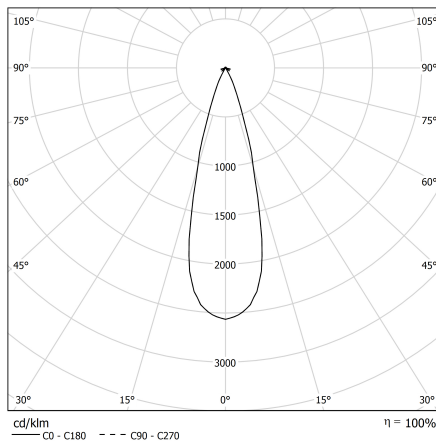

CODE		FLUX	SIZE	CERTIFICATIONS
38VM3K412	3W 12° 4000K	178lm	Ø 45mm	    

### Optic

Polycarbonate lens  
CUT OFF > 60°.

### Specifications

CRI>90;  
McAdams 3;  
Life Time: L80/B10 >50.000h;  
5 years complete warranty;  
Eye safety: RG0/RG1 in accordance with EN62471:2009

### Body

Aluminium body with epoxy powder coating.

### Legal References

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

### Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97