





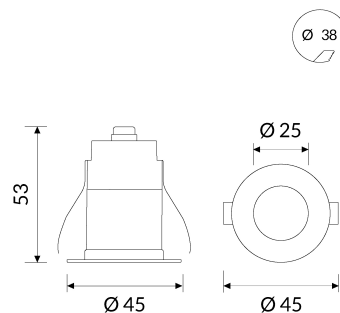

HALL LED DEEP Mini

Miniaturized downlight for spot lighting. CRI>90

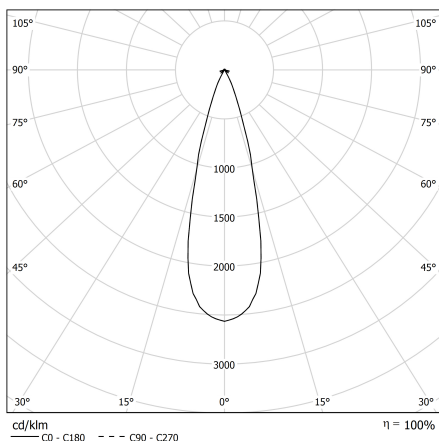

CODE		FLUX	SIZE	CERTIFICATIONS
38VM3K436	3W 36° 4000K	178lm	Ø 45mm	    

Optic

Polycarbonate lens
CUT OFF > 60°.

Body

Aluminium body with epoxy powder coating.

Specifications

CRI>90;
McAdams 3;
Life Time: L80/B10 >50.000h;
5 years complete warranty;
Eye safety: RG0/RG1 in accordance with EN62471:2009

Legal References

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97