



HALL LED ESSENTIAL CEILING

Ideal for residential and hospitality applications

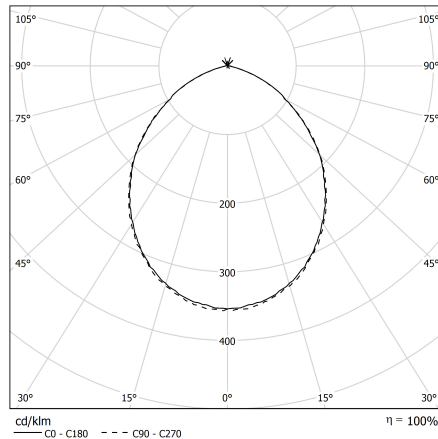

CODE		FLUX	SIZE	CERTIFICATIONS
28PG21L390EM	21W 90° 3000K	1739lm	Ø 204mm	CE IP44 A

Optic

Polycarbonate frosted diffuser.
90° beam angle.
CUT OFF > 10°.

Specifications

SMD LED technology;
Integrated driver;
CRI>90;
Mac Adams 3;
Life Time: L80/B10 >50.000h;
5 years complete warranty;
Eye safety: RG0/RG1 in accordance with EN62471:2009

Body

Polycarbonate body and die-cast aluminum heat sink.

Legal Reference

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

EM: Built-in wiring 230-240V/50-60Hz with power factor >0.97 with 1h emergency block.