




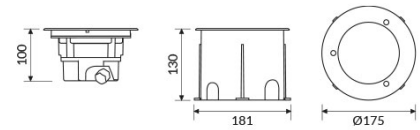



# HALL LED GROUND MEDIUM ACCENT LIGHT

In-ground outdoor recessed installations.

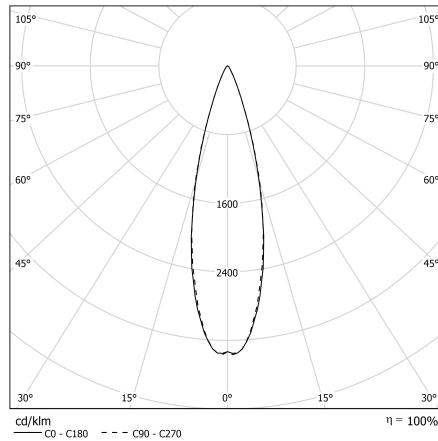

CODE		FLUX	SIZE	CERTIFICATIONS
38AL13K380TM67	13W 80° 3000K	1495lm	175mm	   

## Optics

Internal polymetacrilate lens.  
CUT OFF > 30°.

## Specifications

CoB LED technology  
CRI>80  
McAdams 3  
Life Time: L80/B10 >50.000h  
5 years complete warranty  
Eye safety: RG0/RG1 in accordance with EN62471:2009

## Body

Stainless steel front cover and die-casting aluminum body with epoxy powder coating.

## Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

## Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97