
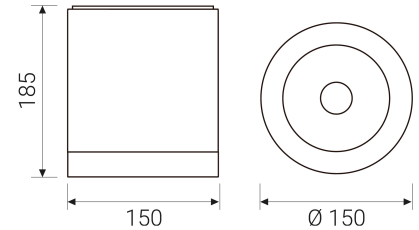


# HALL LED CEILING IP65 LARGE

Clean outdoor solution

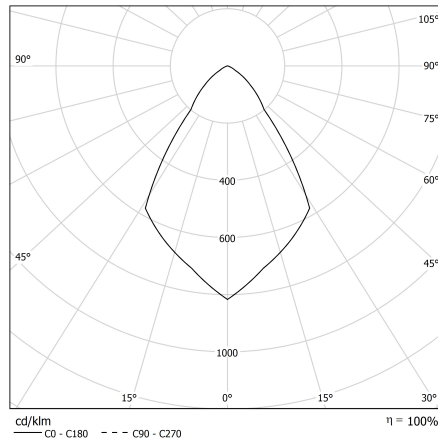

CODE		FLUX	SIZE	CERTIFICATIONS
28VT35L470L65	35W 70° 900mA 4000K	4332lm	150mm	CE IP65 A

## !WARNING!

CRI>80 versions being phased out – will be replaced with Premium CRI>90 versions.

## Optics

Internal aluminum reflectors  
CUT OFF > 30°.

## Specifications

CoB LED technology;  
Integrated driver;  
CRI>80;  
Mac Adams 3;  
Life Time: L80/B50 >50.000h;  
5 years complete warranty;  
Eye safety: risk-free (RG 0) in accordance with EN62471:2009

## Body

Body in die-cast aluminum.

## Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

## Wiring

RE: Built-in wiring 230-240V/50-60Hz with power factor >0.97.