


# INSERT+ ZERO CLIP

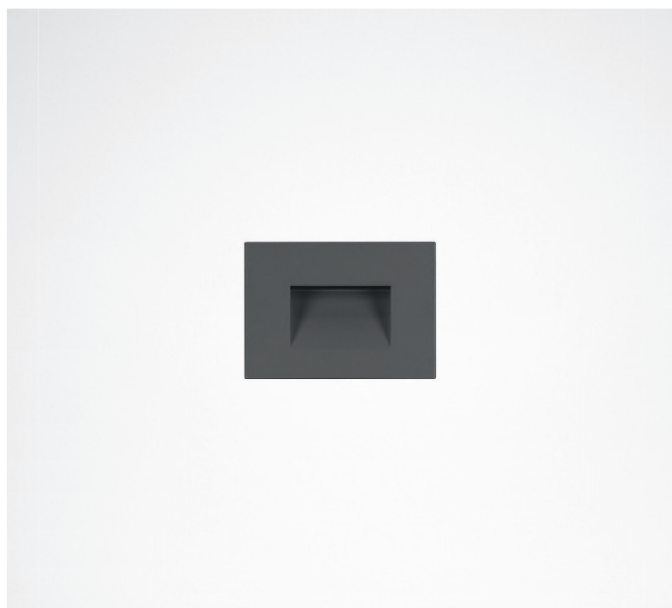




Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

- Wall recessed luminaire, for indoor and outdoor, comprising:
- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
  - Inner satin toughened flat glass diffuser
  - Anti-ageing custom moulded silicone sealing gasket(s)
  - Stainless steel springs for quick connection to recessed box
  - Recessed box (503) included
  - No visible screws
  - The luminaire is suitable for through-wiring



Private villa - Verona - Italy

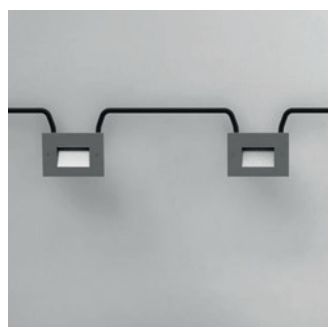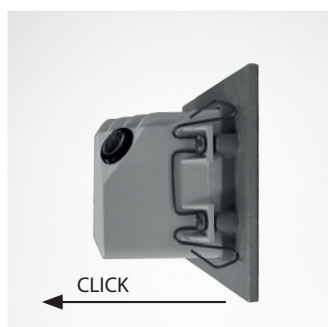







INSERT + ZERO CLIP

# INSERT+ ZERO CLIP

IP65 - IK08



LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
<b>Power LED 220-240 V 50/60 Hz</b>											
4.5	I	-	80	3000	A/M	-	511	142		<b>310064</b>	✓
4.5	I	-	80	2700	A/M	-	511	152		<b>3115405</b>	✓
4.5	I	-	80	3000	A/M	-	511	142		<b>310066</b>	✓
4.5	I	-	80	2700	A/M	-	511	152		<b>3111780</b>	✓
4.5	I	-	80	3000	A/M	-	511	142		<b>310062</b>	✓
4.5	I	-	80	2700	A/M	-	511	152		<b>3115406</b>	✓