


KHA SLIM 250

design by SILVIA PAOLA PENNACCHIO

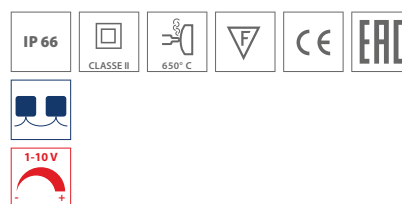

- AN-96 / Anthracite gray / Textured
- BK-81 / Black / Textured
- INOX / Stainless steel / Matt

Range of bollards, comprising:

- Housing and cap made of AISI 316 electropolished stainless steel or powder coated aluminium, depending on versions
- Opal UV stabilized polycarbonate diffuser
- Anti-ageing silicone gasket
- Electrical connection with quick disconnect connector in PA66 without halogens and phosphorus with silver-plated copper contacts, for cables Ø 9 - Ø 14 mm
- Inner aluminum extruded LED heat sink
- Stainless steel external screws
- Technopolymer electrical gear support
- Floor mounted with a galvanised steel foundation plinth to be directly buried into concrete or a stainless steel base to be floor mounted with plugs (included), both available as accessories

2500

Ø 90



KHA SLIM 250 LED C/EW

IK09 10J xx7

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	PART NUMBER
Power LED dimmable 1-10 V 220/240 V 50/60 Hz														
LED	59 W	II	80	4000	•	C/EW	-	6000 lm	3986 lm	80	10	50000 h	●	06083096
LED	59 W	II	80	3000	•	C/EW	-	5800 lm	3863 lm	80	10	50000 h	●	06082796
LED	59 W	II	80	4000	•	C/EW	-	6000 lm	3986 lm	80	10	50000 h	●	06082981
LED	59 W	II	80	3000	•	C/EW	-	5800 lm	3863 lm	80	10	50000 h	●	06082681
LED	59 W	II	80	4000	•	C/EW	-	6000 lm	3986 lm	80	10	50000 h	●	06083104
LED	59 W	II	80	3000	•	C/EW	-	5800 lm	3863 lm	80	10	50000 h	●	06082804


KHA SLIM 250 C/EW

IK09 10J xx7

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	PART NUMBER
Fluorescent - electronic ballast 220/240 V 50/60 Hz														
2G11	1x55/80 W	II	-	-	•	C/EW	-	-	-	-	-	-	●	05194096
2G11	1x55/80 W	II	-	-	•	C/EW	-	-	-	-	-	-	●	05194181
2G11	1x55/80 W	II	-	-	•	C/EW	-	-	-	-	-	-	●	05194204

OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
KHA SLIM 250		
Hot dipped galvanised fixing base for recessing into concrete (suitable only for models 220/250 cm height).		14071220
AISI 316 stainless steel floor installation base (suitable only for models 220/250 cm height).	●	14071120



14071220

14071120


max 9,4 kg

