


LAMA+

design by ROBERTO FIORATO




○ WH-87 / White / Textured

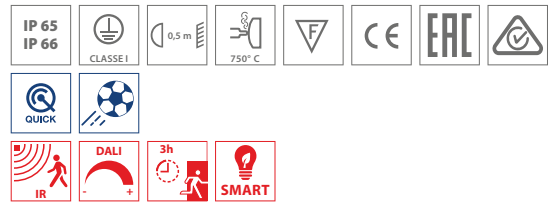


Range of indoor and outdoor suspended LED fixtures, comprising:

- Polyester powder coated die-cast aluminum housing
- Diffuser with integrated louvre in UV, heat stabilised, transparent technopolymer
- High-transparency polycarbonate lenses for best light transmission
- S/W optic with UGR<22
- Anti-ageing silicone gasket with high resiliency
- Cable compartment cover in technopolymer
- Electrical connection with outdoor rated plug & socket quick connector (IP66) that allows connection to mains without opening the luminaire. Made in PA66 with silver-plated brass contacts, for cables Ø 9 - Ø 12 mm
- Light beam obtained by the combination of multiple LED modules
- Galvanised steel suspension hooks
- Stainless steel external screws
- When using the product within environments where mineral or natural oils are present or in atmospheres that are not compatible with polycarbonate, the protective glass available as accessory shall be used
- LAMA+ DETEK is not suitable for operation with the protective glass shade
- Passive infra-red motion sensor
- The SMART version is supplied with an electronic device for the intelligent management of light based upon the wireless platform 868MHz. It allows to build plants able to dynamically interact with the surrounding environment. Specific accessories to program and manage the system are available.

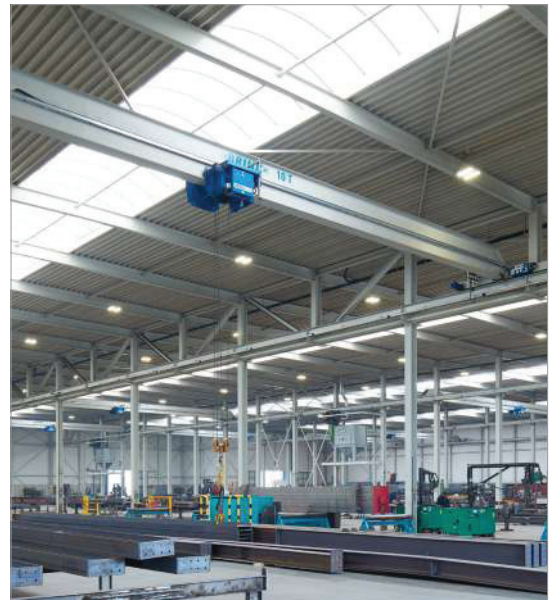


LAMA+
S/W
WSMART



LAMA+
S/W
DETEK



LAMA+
S/W
EM




LAMA+
S/EW
SMART



LAMA+
S/EW
DETEK



LAMA+
S/EW
EM




LAMA+ S/W

IK07 2.6J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Φ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	205 W	I		80	4000	•	S/W	-	32544 lm	25468 lm	70	10	60000 h	○	06272087
LED	148 W	I		80	4000	•	S/W	-	24408 lm	19971 lm	70	10	60000 h	○	06280287
LED	101 W	I		80	4000	•	S/W	-	16128 lm	13033 lm	70	10	60000 h	○	06272187
LED	68 W	I		80	4000	•	S/W	-	12096 lm	9084 lm	70	10	60000 h	○	06280387

IP 66



Power LED - dimmable DALI 220-240 V 50/60 Hz

LED	205 W	I		80	4000	•	S/W	-	32544 lm	25468 lm	70	10	60000 h	○	06272887
LED	148 W	I		80	4000	•	S/W	-	24408 lm	19971 lm	70	10	60000 h	○	06281087
LED	101 W	I		80	4000	•	S/W	-	16128 lm	13033 lm	70	10	60000 h	○	06272987
LED	68 W	I		80	4000	•	S/W	-	12096 lm	9084 lm	70	10	60000 h	○	06281187

LAMA+ S/W SMART

IK07 2.6J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Φ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	205 W	I		80	4000	•	S/W	-	32544 lm	25468 lm	70	10	60000 h	○	06273687
LED	148 W	I		80	4000	•	S/W	-	24408 lm	19971 lm	70	10	60000 h	○	06281887
LED	101 W	I		80	4000	•	S/W	-	16128 lm	13033 lm	70	10	60000 h	○	06273787
LED	68 W	I		80	4000	•	S/W	-	12096 lm	9084 lm	70	10	60000 h	○	06281987

IP 66



LAMA+ S/W DETEK

IK07 2.6J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Φ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz															
LED	205 W	I		80	4000	•	S/W	-	32544 lm	25468 lm	70	10	60000 h	○	06273287
LED	148 W	I		80	4000	•	S/W	-	24408 lm	19971 lm	70	10	60000 h	○	06281487
LED	101 W	I		80	4000	•	S/W	-	16128 lm	13033 lm	70	10	60000 h	○	06273387
LED	68 W	I		80	4000	•	S/W	-	12096 lm	9084 lm	70	10	60000 h	○	06281587

IP 66






LAMA+ S/W EM

IK07 2.6J xx5


LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS Φ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED - Emergency 220-240 V 50/60 Hz															
LED	205 W	I		80	4000	•	S/W	-	32544 lm	25468 lm	70	10	60000 h	○	06274087
LED	148 W	I		80	4000	•	S/W	-	24408 lm	19971 lm	70	10	60000 h	○	06282287
LED	101 W	I		80	4000	•	S/W	-	16128 lm	13033 lm	70	10	60000 h	○	06274187
LED	68 W	I		80	4000	•	S/W	-	12096 lm	9084 lm	70	10	60000 h	○	06282387

IP 65

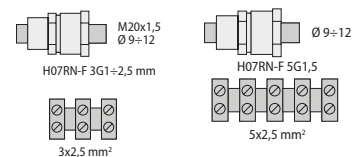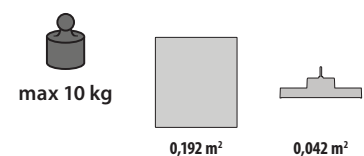

LAMA+ S/EW

IK07 2.6J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
LED	205 W	I		80	4000	•	S/EW	-	32544 lm	28342 lm	70	10	60000 h	○	06271887
LED	148 W	I		80	4000	•	S/EW	-	24408 lm	22237 lm	70	10	60000 h	○	06280087
LED	101 W	I		80	4000	•	S/EW	-	16128 lm	14703 lm	70	10	60000 h	○	06271987
LED	68 W	I		80	4000	•	S/EW	-	12096 lm	10145 lm	70	10	60000 h	○	06280187

IP 66




Power LED - dimmable DALI 220-240 V 50/60 Hz

LED	205 W	I		80	4000	•	S/EW	-	32544 lm	28342 lm	70	10	60000 h	○	06272687
LED	148 W	I		80	4000	•	S/EW	-	24408 lm	22237 lm	70	10	60000 h	○	06280887
LED	101 W	I		80	4000	•	S/EW	-	16128 lm	14703 lm	70	10	60000 h	○	06272787
LED	68 W	I		80	4000	•	S/EW	-	12096 lm	10145 lm	70	10	60000 h	○	06280987

LAMA+ S/EW SMART

IK07 2.6J xx5


LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
LED	205 W	I		80	4000	•	S/EW	-	32544 lm	28342 lm	70	10	60000 h	○	06273487
LED	148 W	I		80	4000	•	S/EW	-	24408 lm	22237 lm	70	10	60000 h	○	06281687
LED	101 W	I		80	4000	•	S/EW	-	16128 lm	14703 lm	70	10	60000 h	○	06273587
LED	68 W	I		80	4000	•	S/EW	-	12096 lm	10145 lm	70	10	60000 h	○	06281787

IP 66



LAMA+ S/EW DETEK

IK07 2.6J xx5


LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
LED	205 W	I		80	4000	•	S/EW	-	32544 lm	28342 lm	70	10	60000 h	○	06273087
LED	148 W	I		80	4000	•	S/EW	-	24408 lm	22237 lm	70	10	60000 h	○	06281287
LED	101 W	I		80	4000	•	S/EW	-	16128 lm	14703 lm	70	10	60000 h	○	06273187
LED	68 W	I		80	4000	•	S/EW	-	12096 lm	10145 lm	70	10	60000 h	○	06281387

IP 66




LAMA+ S/EW EM

IK07 2.6J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS ϕ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
LED	205 W	I		80	4000	•	S/EW	-	32544 lm	28342 lm	70	10	60000 h	○	06273887
LED	148 W	I		80	4000	•	S/EW	-	24408 lm	22237 lm	70	10	60000 h	○	06282087
LED	101 W	I		80	4000	•	S/EW	-	16128 lm	14703 lm	70	10	60000 h	○	06273987
LED	68 W	I		80	4000	•	S/EW	-	12096 lm	10145 lm	70	10	60000 h	○	06282187

IP 65



SMART ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
LAMA+ SMART		
USB KEY		14469720
Trasmitter		14469820
Sensor movement		14469920



14469720



14469820



14469920

OPTIONAL ACCESSORIES


DESCRIPTION	COLOR	PART NUMBER
LAMA+		
Transparent protective glass		14475720
Protective grid LAMA+		14475620
Recessed Frame in painted steel for installation in false ceilings and platform roofs of petrol stations	○	14475820



14475720



14475620



14475820