

MANGO+ MIDI




Part number	3109842
Lampholder:	LED
Light source:	LED
Wattage:	11.5/15 W
Finishing:	WH-RAL9010 / White RAL9010 / Textured
Insulation class:	II
IP degree of protection:	IP20
IK-J-xxIP:	IK07 2J xx5
CRI:	80
Kelvin:	3000
Power factor / COS Φ:	>0.9
Optic:	Extra wide circle reflector
Beam angle:	2x50°
Lightsource lumen output (lm):	1926 lm
Luminaire lumen output (lm):	1455 lm
L:	L80
B:	B10
Lifetime:	50000 h
Min. ambient temperature (°C):	-30
Max. ambient temperature (°C):	35



Description

- Recessed, modular, round LED downlight for indoor, comprising:
- Excellent dissipation with die-cast aluminium heat sink with FAST "Flexible Air Stream Technology"
 - Reflector with integrated ceiling trim made of injection-moulded ABS in white with light-tight connection to LED module
 - Integrated diffuser with optimum diffusion for a very high level of uniformity
 - Multiple-power version supplied with Dip Switches to select one of two power levels, which can be set during the installation phase
 - Quick installation without tools
 - Rapid spring-type installation
 - All components can be tool-less replaced lately
 - Suitable for ceiling tile thickness from 1-25 mm

Photometric data

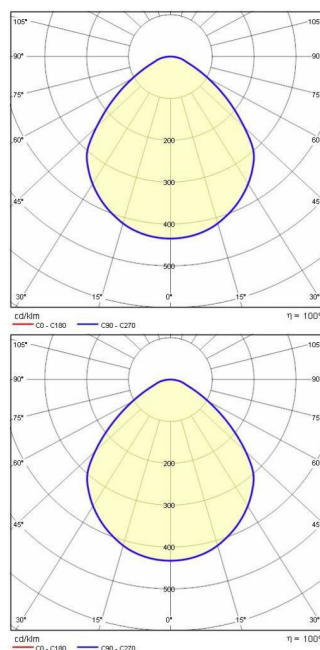

Technical drawings

