

MANGO+ MAXI




| | |
|--|--|
| Part number | 3109850 |
| Lampholder: | LED |
| Light source: | LED |
| Wattage: | 18.5/24 W |
| Finishing: | WH-RAL9010 / White RAL9010 / Textured |
| Insulation class: | II |
| IP degree of protection: | IP20 |
| IK-J-xxIP: | IK07 2J xx5 |
| CRI: | 80 |
| Kelvin: | 3000 |
| Power factor / COS Φ: | >0.9 |
| Optic: | Extra wide circle reflector |
| Beam angle: | 2x51° |
| Lightsource lumen output (lm): | 3354 lm |
| Luminaire lumen output (lm): | 2555 lm |
| L: | L80 |
| B: | B10 |
| Lifetime: | 50000 h |
| Min. ambient temperature (°C): | -30 |
| Max. ambient temperature (°C): | 35 |



Description

- Recessed, modular, round LED downlight for indoor, comprising:
- Excellent dissipation with die-cast aluminium heat sink with FAST "Flexible Air Stream Technology"
 - Reflector with integrated ceiling trim made of injection-moulded ABS in white with light-tight connection to LED module
 - Integrated diffuser with optimum diffusion for a very high level of uniformity
 - Multiple-power version supplied with Dip Switches to select one of two power levels, which can be set during the installation phase
 - Quick installation without tools
 - Rapid spring-type installation
 - All components can be tool-less replaced lately
 - Suitable for ceiling tile thickness from 1-25 mm

Photometric data

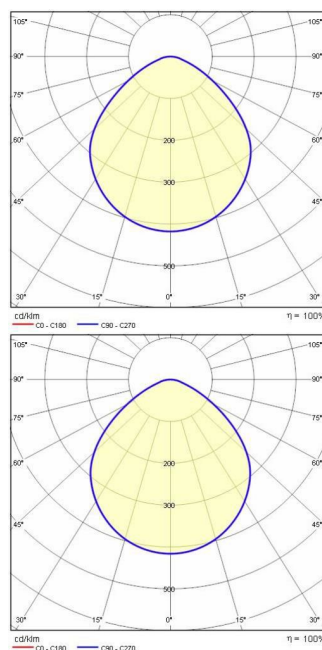

Technical drawings

