


## MIMIK 10 POST 300




<b>Part number</b>	304620
<b>Lampholder:</b>	LED
<b>Light Source:</b>	LED
<b>Wattage:</b>	11 W
<b>Finish:</b>	AN-96 / Anthracite gray / Textured
<b>Insulation class:</b>	I
<b>Degree of protection:</b>	IP65
<b>IK-J-xxIP:</b>	IK08 5J xx5
<b>CRI:</b>	80
<b>Kelvin:</b>	4000
<b>Power factor:</b>	$\text{COS}\phi \geq 0,9$
<b>Optic:</b>	ASYMMETRIC INTENSIVE REFLECTOR
<b>Lightsource lumen output:</b>	1075 lm
<b>Luminaire lumen output:</b>	915 lm
<b>L:</b>	L80
<b>B:</b>	B10
<b>Lifetime:</b>	60000 h
<b>Ta MIN luminaire:</b>	-25°
<b>Ta MAX luminaire:</b>	35°
<b>ULR:</b>	0%

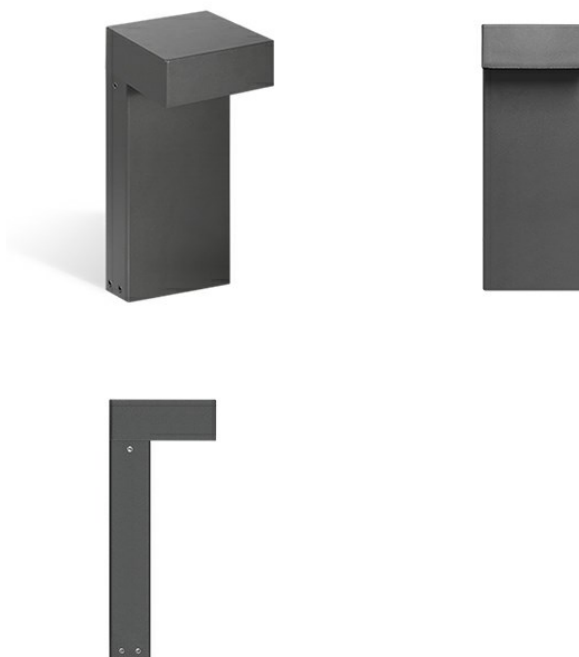


### Description

- Landscaping LED bollard luminaire comprising:
- Painted die-cast aluminium housing and cover
  - Tempered glass diffuser, printed
  - Reflector in satin finish pure aluminium (Al 99.98)
  - Silicone gasket
  - External electrical connection with sealed plug-socket QUICK, complete with cable
  - Stainless steel locking screws
  - Painted extruded aluminium pole
  - Base plate included
  - Powder polyester painting process optimized against UV rays in 13 different steps
  - Complying with the recommendations for glare control and upward light pollution
  - Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

### Photometric data



### Technical drawings



## OPTIONAL ACCESSORIES

### MIMIK 10 POST



310496  
Connection Kit Y 3-way D.7-10.5mm  
IP68