

MIMIK 10



Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

Wall-mounted LED luminaire, comprising:


- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Anti-ageing custom moulded silicone sealing gasket(s)
- Built-in driver
- Stainless steel locking hardware
- Single (M) and dual (B) emission versions available
- The MIMIK versions are available with asymmetric (CP) or circular (C/I) optic options. In the dual emission versions (B), the two different beam types are combined.
- Optimised asymmetric distribution for wide spacing and lighting-class levels matching (CP options)
- Openable and maintainable luminaire (future-proof)
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08




Restaurant Burg Landshut - Bernkastel-Kues - Germany



pg 224
MIMIK 10 CEILING

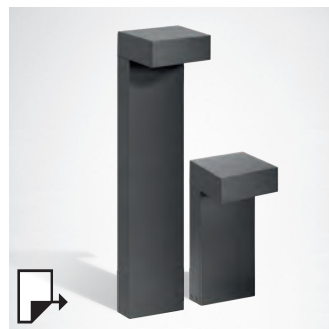


pg 274
MIMIK 10 POST

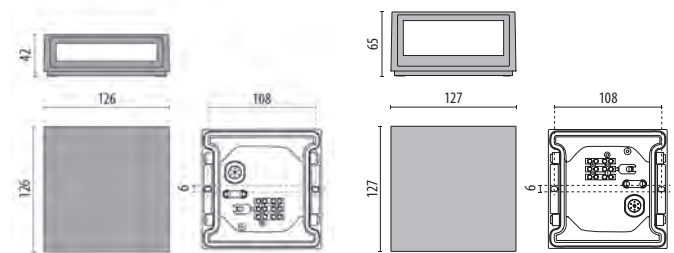

MIMIK 10
FLAT








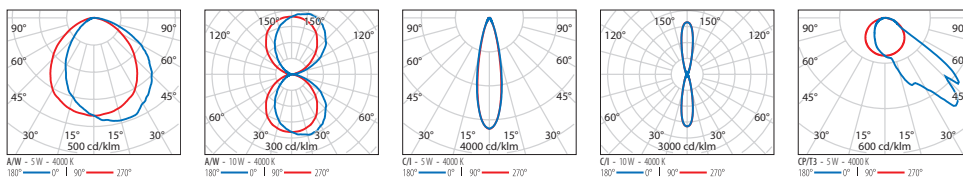

MIMIK 10


Identifying and classifying our optics



MIMIK 10 FLAT M











IP65 - IK06


LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	PRONTO
Power LED 220-240 V 50/60 Hz											
5	I	✓	80	4000	A/W	-	700	487		304827	-
5	I	✓	80	3000	A/W	-	650	465		304824	-
5	I	✓	80	4000	A/W	-	700	487		304826	
5	I	✓	80	3000	A/W	-	650	465		304823	
5	I	✓	80	4000	A/W	-	700	487		304828	-
5	I	✓	80	3000	A/W	-	650	465		304825	



MIMIK 10 FLAT B








IP65 - IK06


LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	PRONTO
Power LED 220-240 V 50/60 Hz											
10	I	✓	80	4000	A/W	-	1357	953		304833	-
10	I	✓	80	3000	A/W	-	1140	906		304830	-
10	I	✓	80	4000	A/W	-	1357	953		304832	
10	I	✓	80	3000	A/W	-	1140	906		304829	
10	I	✓	80	4000	A/W	-	1357	953		304834	
10	I	✓	80	3000	A/W	-	1140	906		304831	



MIMIK 10 M C/I









IP65 - IK05


LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	PRONTO
Power LED 220-240 V 50/60 Hz											
5	I	✓	70	4000	C/I	20°	593	454		304851	-
5	I	✓	70	3000	C/I	20°	561	398		304848	-
5	I	✓	70	4000	C/I	20°	593	454		304850	-
5	I	✓	70	3000	C/I	20°	561	398		304847	
5	I	✓	70	4000	C/I	20°	593	454		304852	-
5	I	✓	70	3000	C/I	20°	561	398		304849	-



MIMIK 10 B C/I









IP65 - IK05

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	PRONTO
Power LED 220-240 V 50/60 Hz											
10	I	✓	70	4000	C/I	20°	1120	932		304863	-
10	I	✓	70	3000	C/I	20°	1040	818		304860	-
10	I	✓	70	4000	C/I	20°	1120	932		304862	
10	I	✓	70	3000	C/I	20°	1040	818		304859	
10	I	✓	70	4000	C/I	20°	1120	932		304864	-
10	I	✓	70	3000	C/I	20°	1040	818		304861	-



MIMIK 10 M CP/T3

IP65 - IK05

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	PRONTO
Power LED 220-240 V 50/60 Hz											
5	I	✓	70	4000	CP/T3	-	593	376		304857	-
5	I	✓	70	3000	CP/T3	-	561	330		304854	-
5	I	✓	70	4000	CP/T3	-	593	376		304856	
5	I	✓	70	3000	CP/T3	-	561	330		304853	
5	I	✓	70	4000	CP/T3	-	593	376		304858	-
5	I	✓	70	3000	CP/T3	-	561	330		304855	-




OPTIONAL ACCESSORIES


Complete unit

1A+1B = please order 2 codes

COMPONENTS	
A	luminaire
B	customising ring

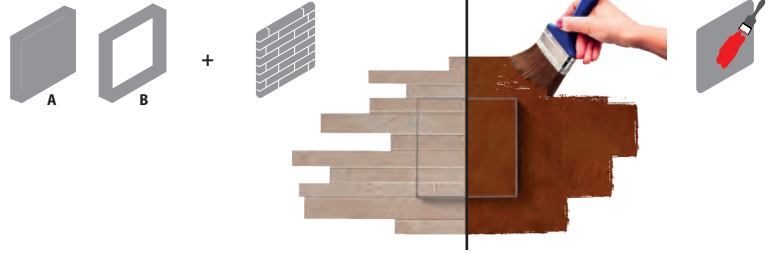

DESCRIPTION	COLOR	PART NUMBER	PRONTO
MIMIK 10 - FLAT M			
Customising ring / Facade Accessory	■	310919	-
Customising ring / Facade Accessory	■	3106087	-
Customising ring / Facade Accessory	□	3106088	-
MIMIK 10 - FLAT B			
Customising ring / Facade Accessory	■	3106883	-
Customising ring / Facade Accessory	■	3106886	-
Customising ring / Facade Accessory	□	3106889	-

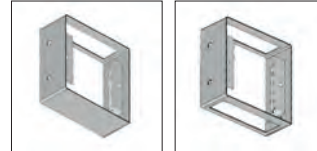

3106087
3106088
310919

3106883
3106886
3106889