


MOON INTELLIGENT

Impact resistant polycarbonate diffuser. Built-in presence sensor.

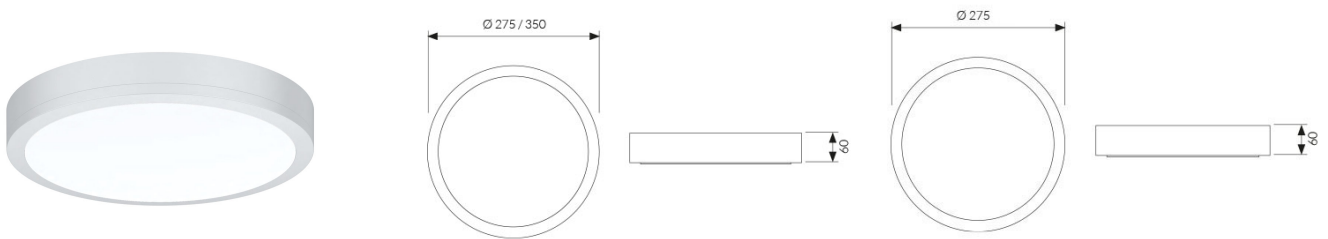

CODE		FLUX	SIZE	CERTIFICATIONS
51PO25L3M65I	25W 3000K	2340lm	Ø 275mm	  

Optic

Impact resistant polycarbonate diffuser.

Specifications

SMD LED Technology
 Built-in driver;
 CRI>90;
 McAdams 3;
 Life Time: L80/B10 >50.000h;
 5 years complete warranty;
 Eye safety: RG0/RG1 in accordance with EN62471:2009

Body

Polycarbonate body.

Legal References

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

RE: Built-in wiring 230-240V/50-60Hz with power factor >0.97.