
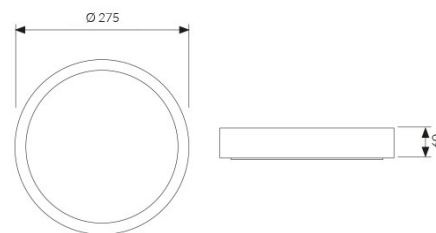


MOON MEDIUM

Impact resistant polycarbonate diffuser. Built-in driver.

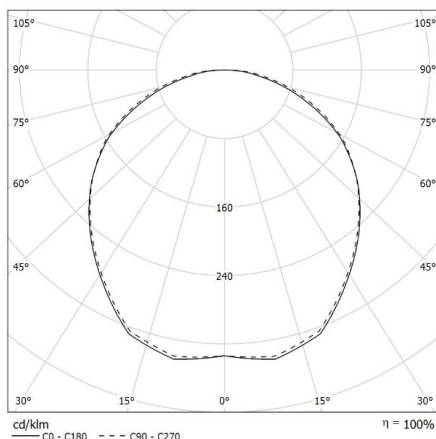

CODE		FLUX	SIZE	CERTIFICATIONS
51PO25K4M65D	25W 4000K	2515lm	Ø 275mm	  

Optics

Impact resistant polycarbonate diffuser.

Body

Polycarbonate.

Technical features

- SMD LED technology
- Built-in driver
- CRI >80
- Eye safety: RG0
- Mac Adams 3
- L90/B10 >50.000h
- -25°-> +40°/45°
- 750°: resistant to glow wire test
- 5 years warranty

Legal References

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Colors

White RAL 9003 - code B

Black RAL 9005 - code C8

Other Colors - on request

Wiring

D:Standard wiring is 220–240V / 50–60Hz, DALI dimmable (The DALI version complies with CAM Edilizia –

Ministerial Decree 24 November 2025, No. 256, Official Gazette No. 281/2025).