


MULTI+ 30 PC HF

Part number 304168

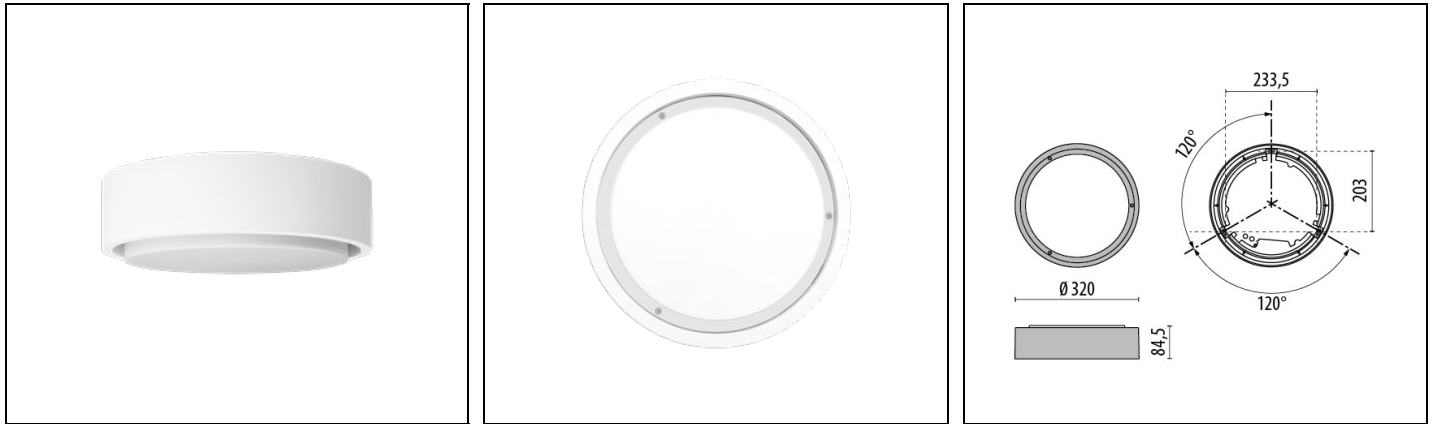

Description

Wall and ceiling mounted luminaire for indoor and outdoor, comprising:

- Technopolymer housing
- Technopolymer vandal-proof opal diffuser, 960°C glow wire test rated
- Class II
- Anti-ageing custom moulded silicone sealing gasket(s)
- Through-wiring designed
- Stainless steel, anti-tampering locking screws
- Max 20 mm diameter for cable/conduit entry
- Integral, tiltable, self-heat dissipating, Metal-Core SMD LED board (future proof)
- Hyper-frequency (HF) sensor operating at 5.8 Ghz +/- 75 Mhz
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

Product data

ETIM Group:	EG000027	ETIM Class:	EC002892
-------------	----------	-------------	----------

General information

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	2226	Luminaire lumen output [lm]:	1270
Luminaire wattage [W]:	16 W	Luminous efficacy [lm/W]:	79
CRI:	80	Colour temperature [K]:	3000
Colour / Finishing:	WH-87 / White / Textured	IP degree of protection:	IP65
IK-J-xxIP:	IK10 20J xxg	Optic:	Symmetric Extra-Wide
Net weight [kg]:	1.189	Overall diameter [mm]:	320
Overall width [mm]:	85		

Mechanical features

Shape:	ROUND > 300 MM	Housing material:	Plastic
Diffuser material:	PLASTIC	Glow wire test [°C]:	750 °C
Anti-vandal screws:			

Electrical features

Voltage type:	AC	Input voltage [V AC]:	220/240
Input frequency [Hz]:	50/60	Power factor / COS Φ:	>0.9
Inrush current [A/μs]:	5 / 50	C10 1.5 mm ² :	52
C16 2.5 mm ² :	85	B10 1.5 mm ² :	31
B16 2.5 mm ² :	50		


Installation

Application area:	Outdoor	Mounting type:	Bulkheads
Min. ambient temperature [°C]:	-20	Max. ambient temperature [°C]:	30

Light features

MacAdam:	3	Lumen maintenance:	L80B10@6000oh
Distribution of light emission:	Direct		

Photometric data

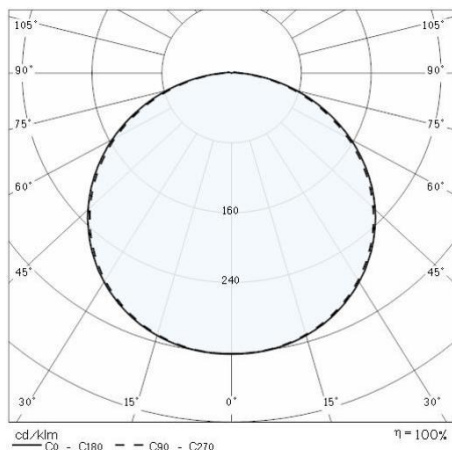

Optional accessories

MULTI+ 30 PC



310514

Tool TORX