


# MULTI+ 30 PC

Part number 304175

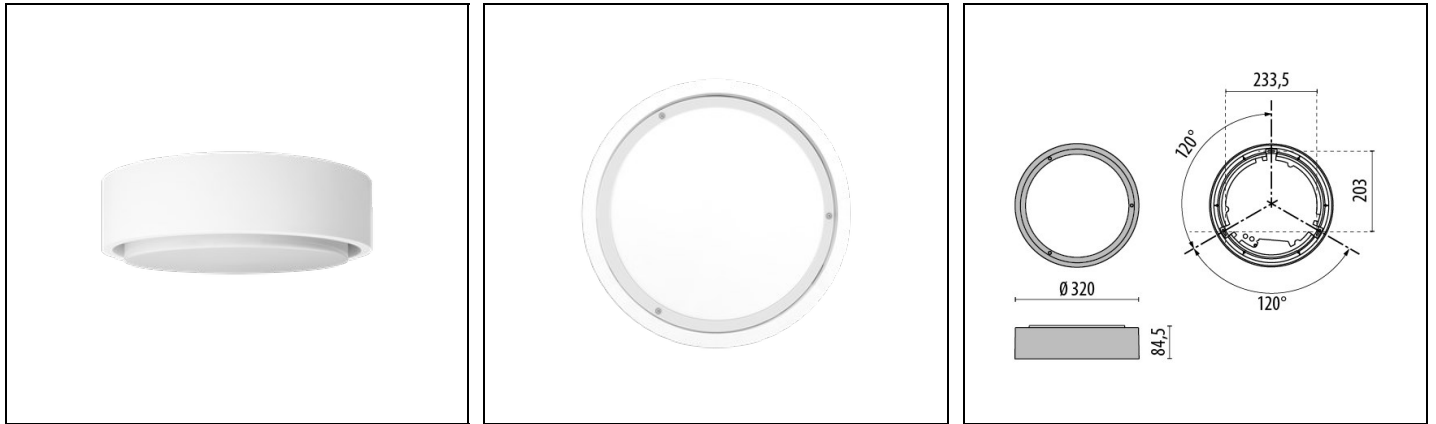

## Description

Wall and ceiling mounted luminaire for indoor and outdoor, comprising:

- Technopolymer housing
- Technopolymer vandal-proof opal diffuser, 960°C glow wire test rated
- Class II
- Anti-ageing custom moulded silicone sealing gasket(s)
- Through-wiring designed
- Stainless steel, anti-tampering locking screws
- Max 20 mm diameter for cable/conduit entry
- Integral, tiltable, self-heat dissipating, Metal-Core SMD LED board (future proof)
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at [www.performanceinlighting.com/qr/qr/company/terms-and-conditions](http://www.performanceinlighting.com/qr/qr/company/terms-and-conditions)

## Product data

ETIM Group:	EG000027	ETIM Class:	EC002892
-------------	----------	-------------	----------

## General information

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	1613	Luminaire lumen output [lm]:	793
Luminaire wattage [W]:	9.5 W	Luminous efficacy [lm/W]:	83
CRI:	80	Colour temperature [K]:	4000
Colour / Finishing:	WH-87 / White / Textured	IP degree of protection:	IP65
IK-J-xxIP:	IK10 20J xxg	Optic:	Symmetric Extra-Wide
Net weight [kg]:	1.104	Overall diameter [mm]:	320
Overall width [mm]:	85		

## Mechanical features

Shape:	ROUND > 300 MM	Housing material:	Plastic
Diffuser material:	PLASTIC	Glow wire test [°C]:	750 °C
Anti-vandal screws:			

## Electrical features

Voltage type:	AC/DC	Input voltage [V AC]:	220/240
Input frequency [Hz]:	0/50/60	Power factor / COS Φ:	>0.9
Input voltage [V DC]:	170/276	Inrush current [A/μs]:	5 / 50
C10 1.5 mm <sup>2</sup> :	52	C16 2.5 mm <sup>2</sup> :	85
B10 1.5 mm <sup>2</sup> :	31	B16 2.5 mm <sup>2</sup> :	50


## Installation

Application area:	Outdoor	Mounting type:	Bulkheads
Min. ambient temperature [°C]:	-20	Max. ambient temperature [°C]:	30

## Light features

MacAdam:	3	Lumen maintenance:	L80B10@60000h
Distribution of light emission:	Direct		

## Photometric data

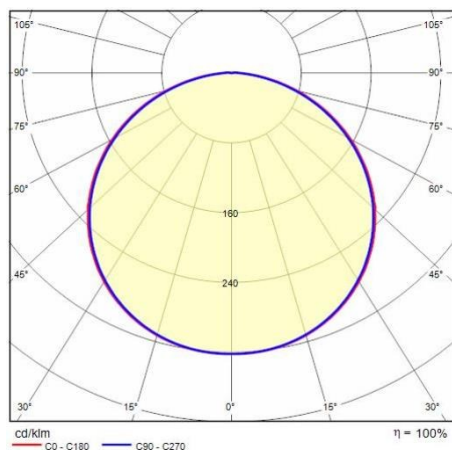

## Optional accessories

### MULTI+ 30 PC



**310514**

Tool TORX