





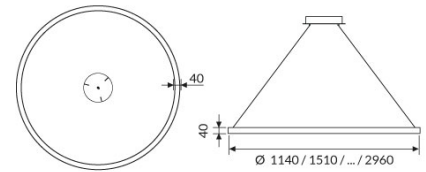


## ONE RING PG Double Emission

Decorative technical element with various diameters, direct / indirect emission. UGR<22

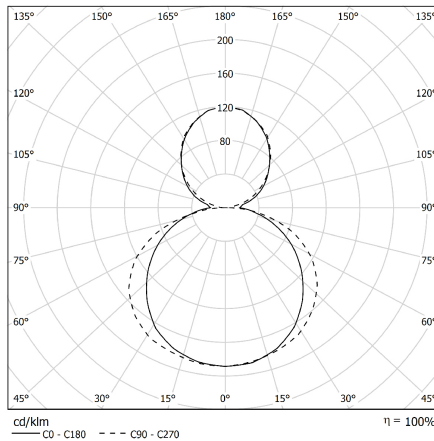

CODE		FLUX	SIZE	CERTIFICATIONS
17DI63PGK3D	63W 3000K	5578lm	790mm	   

### Optic

Methacrylate satin diffuser for soft diffusion with UGR<22

### Specifications

CRI>90

McAdams 3

Life Time: L80/B10 >50.000h

5 years complete warranty

Eye safety: RG0/RG1 in accordance with EN62471:2009

### Body

Manufactured from extruded aluminum with epoxy powder coating.

### Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

### Wiring

D: Built-in wiring 230-240V/50-60Hz, DALI dimmable.