
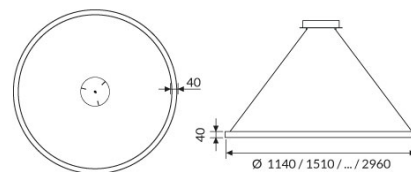



## ONE RING PG Double Emission

Decorative technical element with various diameters, direct / indirect emission. UGR<22

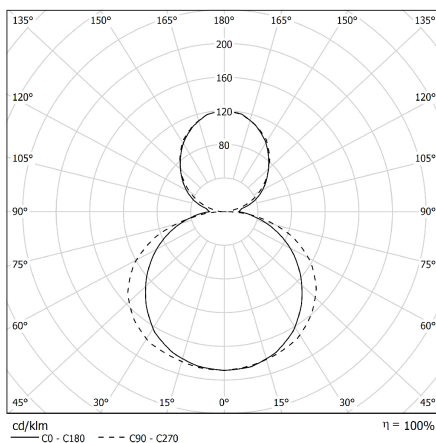

CODE		FLUX	SIZE	CERTIFICATIONS
17DI63PGL390	63W 3000K	5578lm	790mm	CE IP40 A <sup>+</sup>

### Optic

Methacrylate satin diffuser for soft diffusion with UGR<22

### Specifications

CRI>90  
McAdams 3  
Life Time: L80/B10 >50.000h  
5 years complete warranty  
Eye safety: RG0/RG1 in accordance with EN62471:2009

### Body

Manufactured from extruded aluminum with epoxy powder coating.

### Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

### Wiring

RE: Built-in wiring 230-240V/50-60Hz with power factor >0.97.