




ONE RING



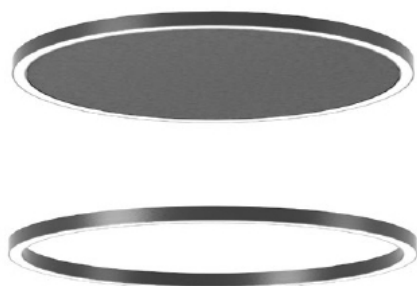

ONE RING is a **decorative yet highly technical fixture** with a minimal design and multiple application possibilities. Available in a range of diameters, for direct ceiling or suspended mounting, with direct or direct/indirect light emission and the possibility of adding adjustable spotlights for accent lighting. With the option of including a central acoustic with sound absorption panels, **ONE RING** is a truly unique lighting solution.

ID 17









esse-ci

FEATURES

-  Direct emission
-  Direct/Indirect emission
-  UGR <22; <19
-  IP 40






LED

-  3000K/4000K
-  >107 lm/W
-  CRI >90
-  Eye safety: R60/R61
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  EEA Conformity
-  Energy efficiency
-  Energy efficiency per versione SPOT
-  5 years warranty

ON REQUEST

-  DALI - code D*
-  Bluetooth - code BT*
-  Emergency 1 hr - code EM*
Emergency 3 hrs - code EM3R*
-  Ceiling version*
-  2700K - code K27*

SPECIFICATIONS

Satin methacrylate diffuser for homogeneous emission UGR<22. Impact resistant DPL diffuser with homogeneous and controlled emission, UGR<19.

BODY

Aluminum with epoxy powder coating.

COLORS

White RAL 9003 - code B
Black RAL 9005 - code C8

* Where available


ONE RING^{PG}

Accessories on page 83.

IP 40

Satin methacrylate diffuser for homogeneous emission UGR <22.

Power supply box and suspensions (L. 3000mm) included.



Cod. 4000K	Icon	lm	Ø mm
17PG39K4	39W	4173	790
17PG58K4	58W	6216	1140
17PG77K4	77W	8288	1510
17PG96K4	96W	10360	1860
17PG115K4	115W	12432	2240
17PG134K4	134W	14504	2592
17PG154K4	154W	16576	2960

Cod. 3000K	Icon	lm	Ø mm
17PG39K3	39W	3881	790
17PG58K3	58W	5780	1140
17PG77K3	77W	7708	1510
17PG96K3	96W	9635	1860
17PG115K3	115W	11562	2240
17PG134K3	134W	13489	2592
17PG154K3	154W	15416	2960

For "ceiling" version with remote driver add "P" to the code.


ONE RING^{PG DOUBLE EMISSION}

Accessories on page 83.

IP 40

Satin methacrylate diffuser for homogeneous emission UGR <22. Direct / Indirect emission.

Power supply box and suspensions (L. 3000mm) included.



Cod. 4000K	Icon	lm	Ø mm
17DI63PGK4	63W: 39W+24W	6057	790
17DI93PGK4	93W: 58W+35W	8966	1140
17DI123PGK4	123W: 77W+46W	11588	1510
17DI153PGK4	153W: 96W+57W	14760	1860
17DI184PGK4	184W: 115W+69W	17382	2240
17DI215PGK4	215W: 134W+81W	20554	2592
17DI246PGK4	246W: 154W+92W	23726	2960

Cod. 3000K	Icon	lm	Ø mm
17DI63PGK3	63W: 39W+24W	5578	790
17DI93PGK3	93W: 58W+35W	8255	1140
17DI123PGK3	123W: 77W+46W	10678	1510
17DI153PGK3	153W: 96W+57W	13595	1860
17DI184PGK3	184W: 115W+69W	16017	2240
17DI215PGK3	215W: 134W+81W	18934	2592
17DI246PGK3	246W: 154W+92W	21851	2960


For ceiling version with remote driver add "P" to the code.

ONE RING ^{DPL}

IP 40

Diffuser with Diamond Prism LED (DPL) technology with UGR <19 for environments with display screen equipment.

Power supply box and suspensions (L. 3000mm) included.



Cod. 4000K	W	lm	Ø mm
17DPL39K4	39W	3950	790
17DPL58K4	58W	5880	1140
17DPL77K4	77W	7840	1510
17DPL96K4	96W	9800	1860
17DPL115K4	115W	11760	2240
17DPL134K4	134W	13720	2592
17DPL154K4	154W	15680	2960

Cod. 3000K	W	lm	Ø mm
17DPL39K3	39W	3674	790
17DPL58K3	58W	5468	1140
17DPL77K3	77W	7291	1510
17DPL96K3	96W	9114	1860
17DPL115K3	115W	10937	2240
17DPL134K3	134W	12760	2592
17DPL154K3	154W	14582	2960


For ceiling version with remote driver add "P" to the code.

ONE RING ^{DPL DOUBLE EMISSION}

IP 40

Diffuser with Diamond Prism LED (DPL) technology with UGR <19 for environments with display screen equipment. Direct/Indirect emission.

Power supply box and suspensions (L. 3000mm) included.



Cod. 4000K	W	lm	Ø mm
17DI63DPLK4	63W: 39W+24W	5834	790
17DI93DPLK4	93W: 58W+35W	8630	1140
17DI123DPLK4	123W: 77W+46W	11140	1510
17DI153DPLK4	153W: 96W+57W	14200	1860
17DI184DPLK4	184W: 115W+69W	16710	2240
17DI215DPLK4	215W: 134W+81W	19770	2592
17DI246DPLK4	246W: 154W+92W	22830	2960

Cod. 3000K	W	lm	Ø mm
17DI63DPLK3	63W: 39W+24W	5371	790
17DI93DPLK3	93W: 58W+35W	7943	1140
17DI123DPLK3	123W: 77W+46W	10261	1510
17DI153DPLK3	153W: 96W+57W	13074	1860
17DI184DPLK3	184W: 115W+69W	15392	2240
17DI215DPLK3	215W: 134W+81W	18205	2592
17DI246DPLK3	246W: 154W+92W	21017	2960


For ceiling version with remote driver add "P" to the code.

ONE RING PG ACOUSTIC DOUBLE EMISSION

IP 40

Satin methacrylate diffuser for homogeneous emission UGR <22. Direct / Indirect emission.

Power supply box and suspensions (L. 3000mm) included. Gray sound-absorbing panel.



Cod. 4000K		lm	Ø mm
17DI93PGK4AC	93W: 58W+35W	8966	1140


Cod. 3000K		lm	Ø mm
17DI93PGK3AC	93W: 58W+35W	8255	1140

For ceiling version with remote driver add "P" to the code.

ONE RING SPOT

IP 40

Spot light installable on One Ring. Beam angles: 15° - 20° - 36° - 50°.



Cod. 4000K		lm	Ø mm
17VT9K415	9W 15°	1094	60
17VT9K420	9W 20°	1094	60
17VT9K436	9W 36°	1094	60
17VT9K450	9W 50°	1094	60

Cod. 3000K		lm	Ø mm
17VT9K315	9W 15°	923	60
17VT9K320	9W 20°	923	60
17VT9K336	9W 36°	923	60
17VT9K350	9W 50°	923	60

ACCESSORIES



Kit of transparent screens for the indirect lighting side.

- 17AASCINTR790** Diam. Ø 790mm
- 17AASCINTR1140** Diam. Ø 1140mm
- 17AASCINTR1510** Diam. Ø 1510mm
- 17AASCINTR1860** Diam. Ø 1860mm

- 17AASCINTR2240** Diam. Ø 2240mm
- 17AASCINTR2592** Diam. Ø 2592mm
- 17AASCINTR2960** Diam. Ø 2960mm