

ORION H



design by PERFORMANCE IN LIGHTING




- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

Wall-mounted LED luminaire, comprising:

- Painted, die-cast aluminium housing, in compact size
- Microprismatic, flat glass diffuser, screen-printed inside
- Aluminium reflector
- Anti-ageing silicone gasket
- Driver On Board 220-240V 50/60Hz LED module protected against surges up to 500 V
- Stainless steel looking grains
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

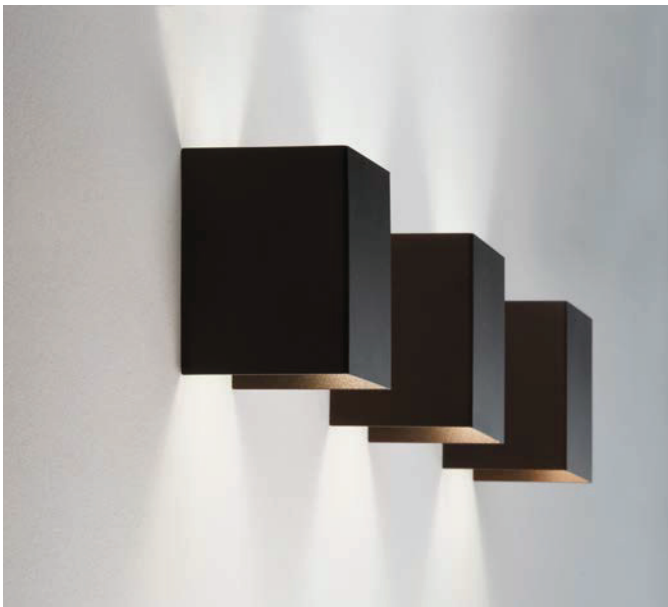

The decorative sleeve changes the luminous effect of the luminaire and is available as an accessory (to be ordered separately). Consult factory (custom RAL).




pg 294
ORION POST 600

ORION H M

IK06 1J xx3


WATTAGE	CLASS	CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER	
Power LED 220-240 V 50/60 Hz														
5,5 W	I	-	80	4000	✓	A9/EW	-	742 lm	259 lm	70	10	35000 h	●	3105448
5,5 W	I	-	80	3000	✓	A9/EW	-	675 lm	259 lm	70	10	35000 h	●	3105446
5,5 W	I	-	80	4000	✓	A9/EW	-	742 lm	259 lm	70	10	35000 h	○	3105449
5,5 W	I	-	80	3000	✓	A9/EW	-	675 lm	259 lm	70	10	35000 h	○	3105447

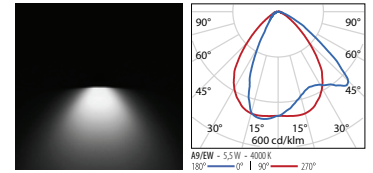

ORION H B


IK06 1J xx3

WATTAGE	CLASS	CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER	
Power LED 220-240 V 50/60 Hz														
10 W	I	-	80	4000	✓	A40/W	-	1485 lm	501 lm	70	10	35000 h	●	3105452
10 W	I	-	80	3000	✓	A40/W	-	1350 lm	501 lm	70	10	35000 h	●	3105450
10 W	I	-	80	4000	✓	A40/W	-	1485 lm	501 lm	70	10	35000 h	○	3105453
10 W	I	-	80	3000	✓	A40/W	-	1350 lm	501 lm	70	10	35000 h	○	3105451

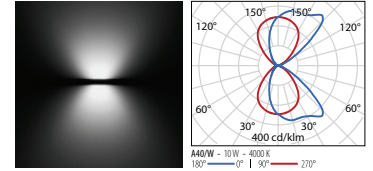



OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
ORION		
Carter ORION H	●	3106290
Carter ORION H	○	3106289
Carter ORION H	●	3106291



Complete unit
1A+1B = please order 2 codes

COMPONENTS
A luminaire
B customising carter

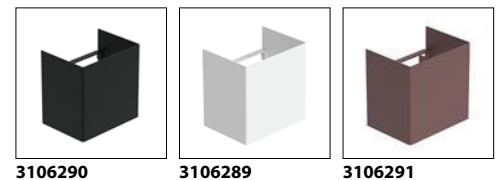

ORION V



design by PERFORMANCE IN LIGHTING




- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

Wall-mounted LED luminaire, comprising:

- Painted, die-cast aluminium housing, in compact size
- Extra-clear, tempered, flat glass diffuser, screen-printed inside
- Aluminium reflector
- Anti-ageing silicone gasket
- Driver On Board 220-240V 50/60Hz LED module protected against surges up to 500 V
- Stainless steel looking grains
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

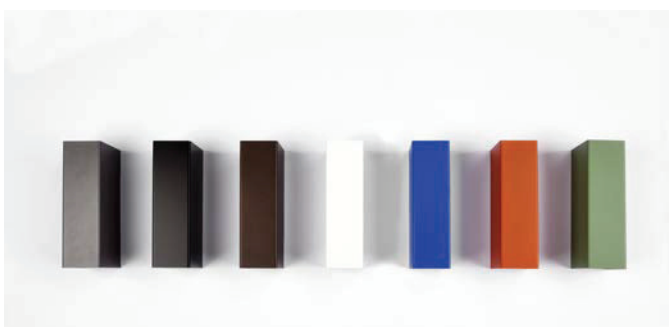

The decorative sleeve changes the luminous effect of the luminaire and is available as an accessory (to be ordered separately). Consult factory (custom RAL).




pg 294
ORION POST

ORION V M

IK06 1J xx3


WATTAGE	CLASS	CRI	KELVIN	COS ϕ ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER	
Power LED 220-240 V 50/60 Hz														
5,5 W	I	-	80	4000	✓	S/EW	-	742 lm	409 lm	70	10	35000 h	●	3105440
5,5 W	I	-	80	3000	✓	S/EW	-	675 lm	409 lm	70	10	35000 h	●	3105438
5,5 W	I	-	80	4000	✓	S/EW	-	742 lm	409 lm	70	10	35000 h	○	3105441
5,5 W	I	-	80	3000	✓	S/EW	-	675 lm	409 lm	70	10	35000 h	○	3105439

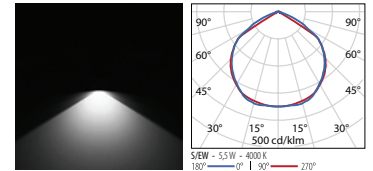

ORION V B



IK06 1J xx3

WATTAGE	CLASS	CRI	KELVIN	COS ϕ ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER	
Power LED 220-240 V 50/60 Hz														
11 W	I	-	80	4000	✓	S/EW	-	1484 lm	800 lm	70	10	35000 h	●	3105444
11 W	I	-	80	3000	✓	S/EW	-	1350 lm	800 lm	70	10	35000 h	●	3105442
11 W	I	-	80	4000	✓	S/EW	-	1484 lm	800 lm	70	10	35000 h	○	3105445
11 W	I	-	80	3000	✓	S/EW	-	1350 lm	800 lm	70	10	35000 h	○	3105443

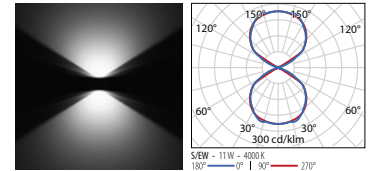

OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
ORION V		
Carter ORION V	●	3106287
Carter ORION V	○	3106286
Carter ORION V	●	3106288

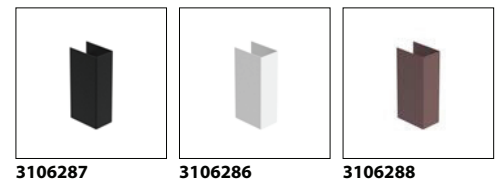

Complete unit
1A+1B = please order 2 codes

COMPONENTS
A luminaire
B customising ring

