



PCM LED EVO PC

High impact resistance and high protection against dust and water. CRI>80

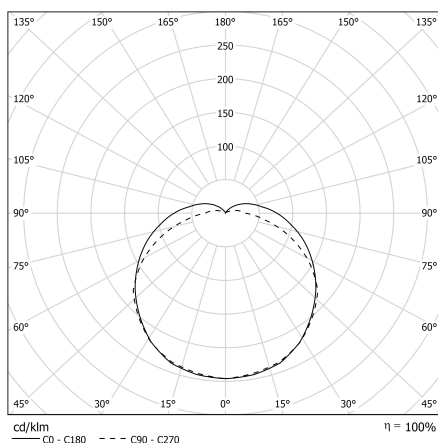

CODE		FLUX	SIZE	CERTIFICATIONS
03PC10K466	10W 4000K	1450lm	610mm	   

Optic

Translucent polycarbonate screen UV stabilized.
Internal reflector in painted steel sheet UV stabilized.

Specifications

Colour temperature: 4000K;
CRI>80;
Mac Adams 3;
Temperature range: -25° -> +40°/45°;
IK10;
Life Time: L80/B10 50.000h;
5 years complete warranty;
Eye safety: RG0/RG1 in accordance with EN62471:2009

Body

Polycarbonate body with high mechanical resistance.

Legal References

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97