
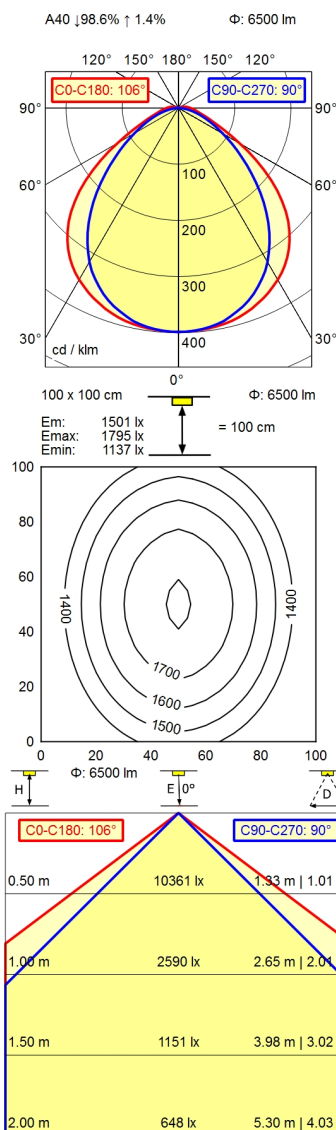




light source
work equipment
connected load
power consumption
luminous flux
luminous efficiency
light type/color
colour temperatur
color rendering index
light distribution
direct ratio
beam angle
chromaticity tolerance LED
glare control
luminance (L65)
unified glare rating (4H 8H)
system of protection
class of protection
technology
operation
housing
cover
weight (net)
mains lead
fastening
dimension
side part
light output
maximum ambient temperature

LED
without
230 V; Wechselstrom (AC); 50 Hz; 60 Hz
ca. 80 W
approx. 6.500 lm
approx. 81 lm/W
cold white
approx. 5.000 K
CRI > 80
direct
approx. 99 %
100°
< 4 SDCM
diffuser foil
<= 18000 cd/m²
<= 25
IP 67
III
switchable; no notice
external
borosilicate glass
borosilicate
ca. 6,1 kg
built-in plug; ST16/2 BS
pipe clamp (accessory)
A=1490 mm
A with screwed cable gland
D=1436 mm
40 °C