



**light source**

**work equipment**  
**connected load**  
**Power consumption**  
**luminous flux**  
**luminous efficacy**  
**colour temperature**  
**color rendering index (CRI)**  
**glare control**  
**System of protection**  
**class of protection**  
**technology**  
**operation**  
**luminaire body**

**weight (net)**  
**mains lead**

**design**  
**Fastening**  
**special features**

LED

Energy efficiency category A/A+/A++

electronic transformer

100-240 V; 50/60 Hz

approx. 24 W

approx. 1100 lm

approx. 45 lm/W

neutral white, approx. 5000 K

>= 80

conical prismatic screen

IP20

I

continuously dimmable

multi-function switch

sectional aluminium, ESD-coat of lacquer, aluminium

coloured anodised

approx. 1.4 kg

approx. 4,7 m; mains plug

CEE 7/VII

mounted version

screw-down bracket; horizontal

ESD version, fixed connection




CEE 7/VII

**illuminance**

distance: 50 cm

**Em:** 1016 lx  
**E<sub>max</sub>:** 2671 lx  
**E<sub>min</sub>:** 180 lx

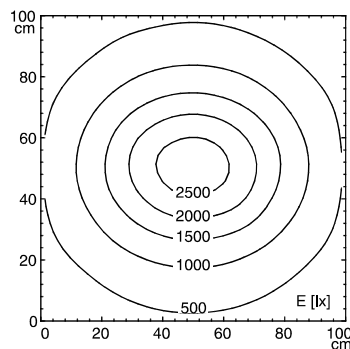

**luminous intensity**

