

SCOUT

ID CODE: 91






An architectural lighting collection with refined style.

Utilising the very latest in lighting technology, SCOUT is an interesting and innovative approach to exterior ambient lighting. A totally unique diffuser material is incorporated within the metal frame of the housing, that is **invisible when turned off and evenly lit when turned on**, ensuring high visual comfort and uniform outwards light emission. A complete collection with floor mounted bollards, wall mounted bulkheads and versions with adjustable accent spotlights to complete the range.








Design
Serge & Robert Cornelissen

FEATURES

-  Direct Emission
-  UGR < 22
-  IP 66
-  IK 06
-  -20°C +40°C

LED

-  3000K
- >100 lm/W icon" data-bbox="146 558 160 572"/> >100 lm/W
-  CRI > 80
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  CE
-  A+
-  5 years warranty

ON REQUEST





-  4000K


Specifications Built-in driver.

Optic PMMA diffuser with built-in transparent light particles.

Body Manufactured from pressure die-cast aluminum with epoxy powder coating.

Colour


-  White RAL 9003 wrinkled - Code: W
-  Black RAL 9005 wrinkled - Code: BK
-  Anthracite - Code: GA
-  Bronze Corten - Code: BC

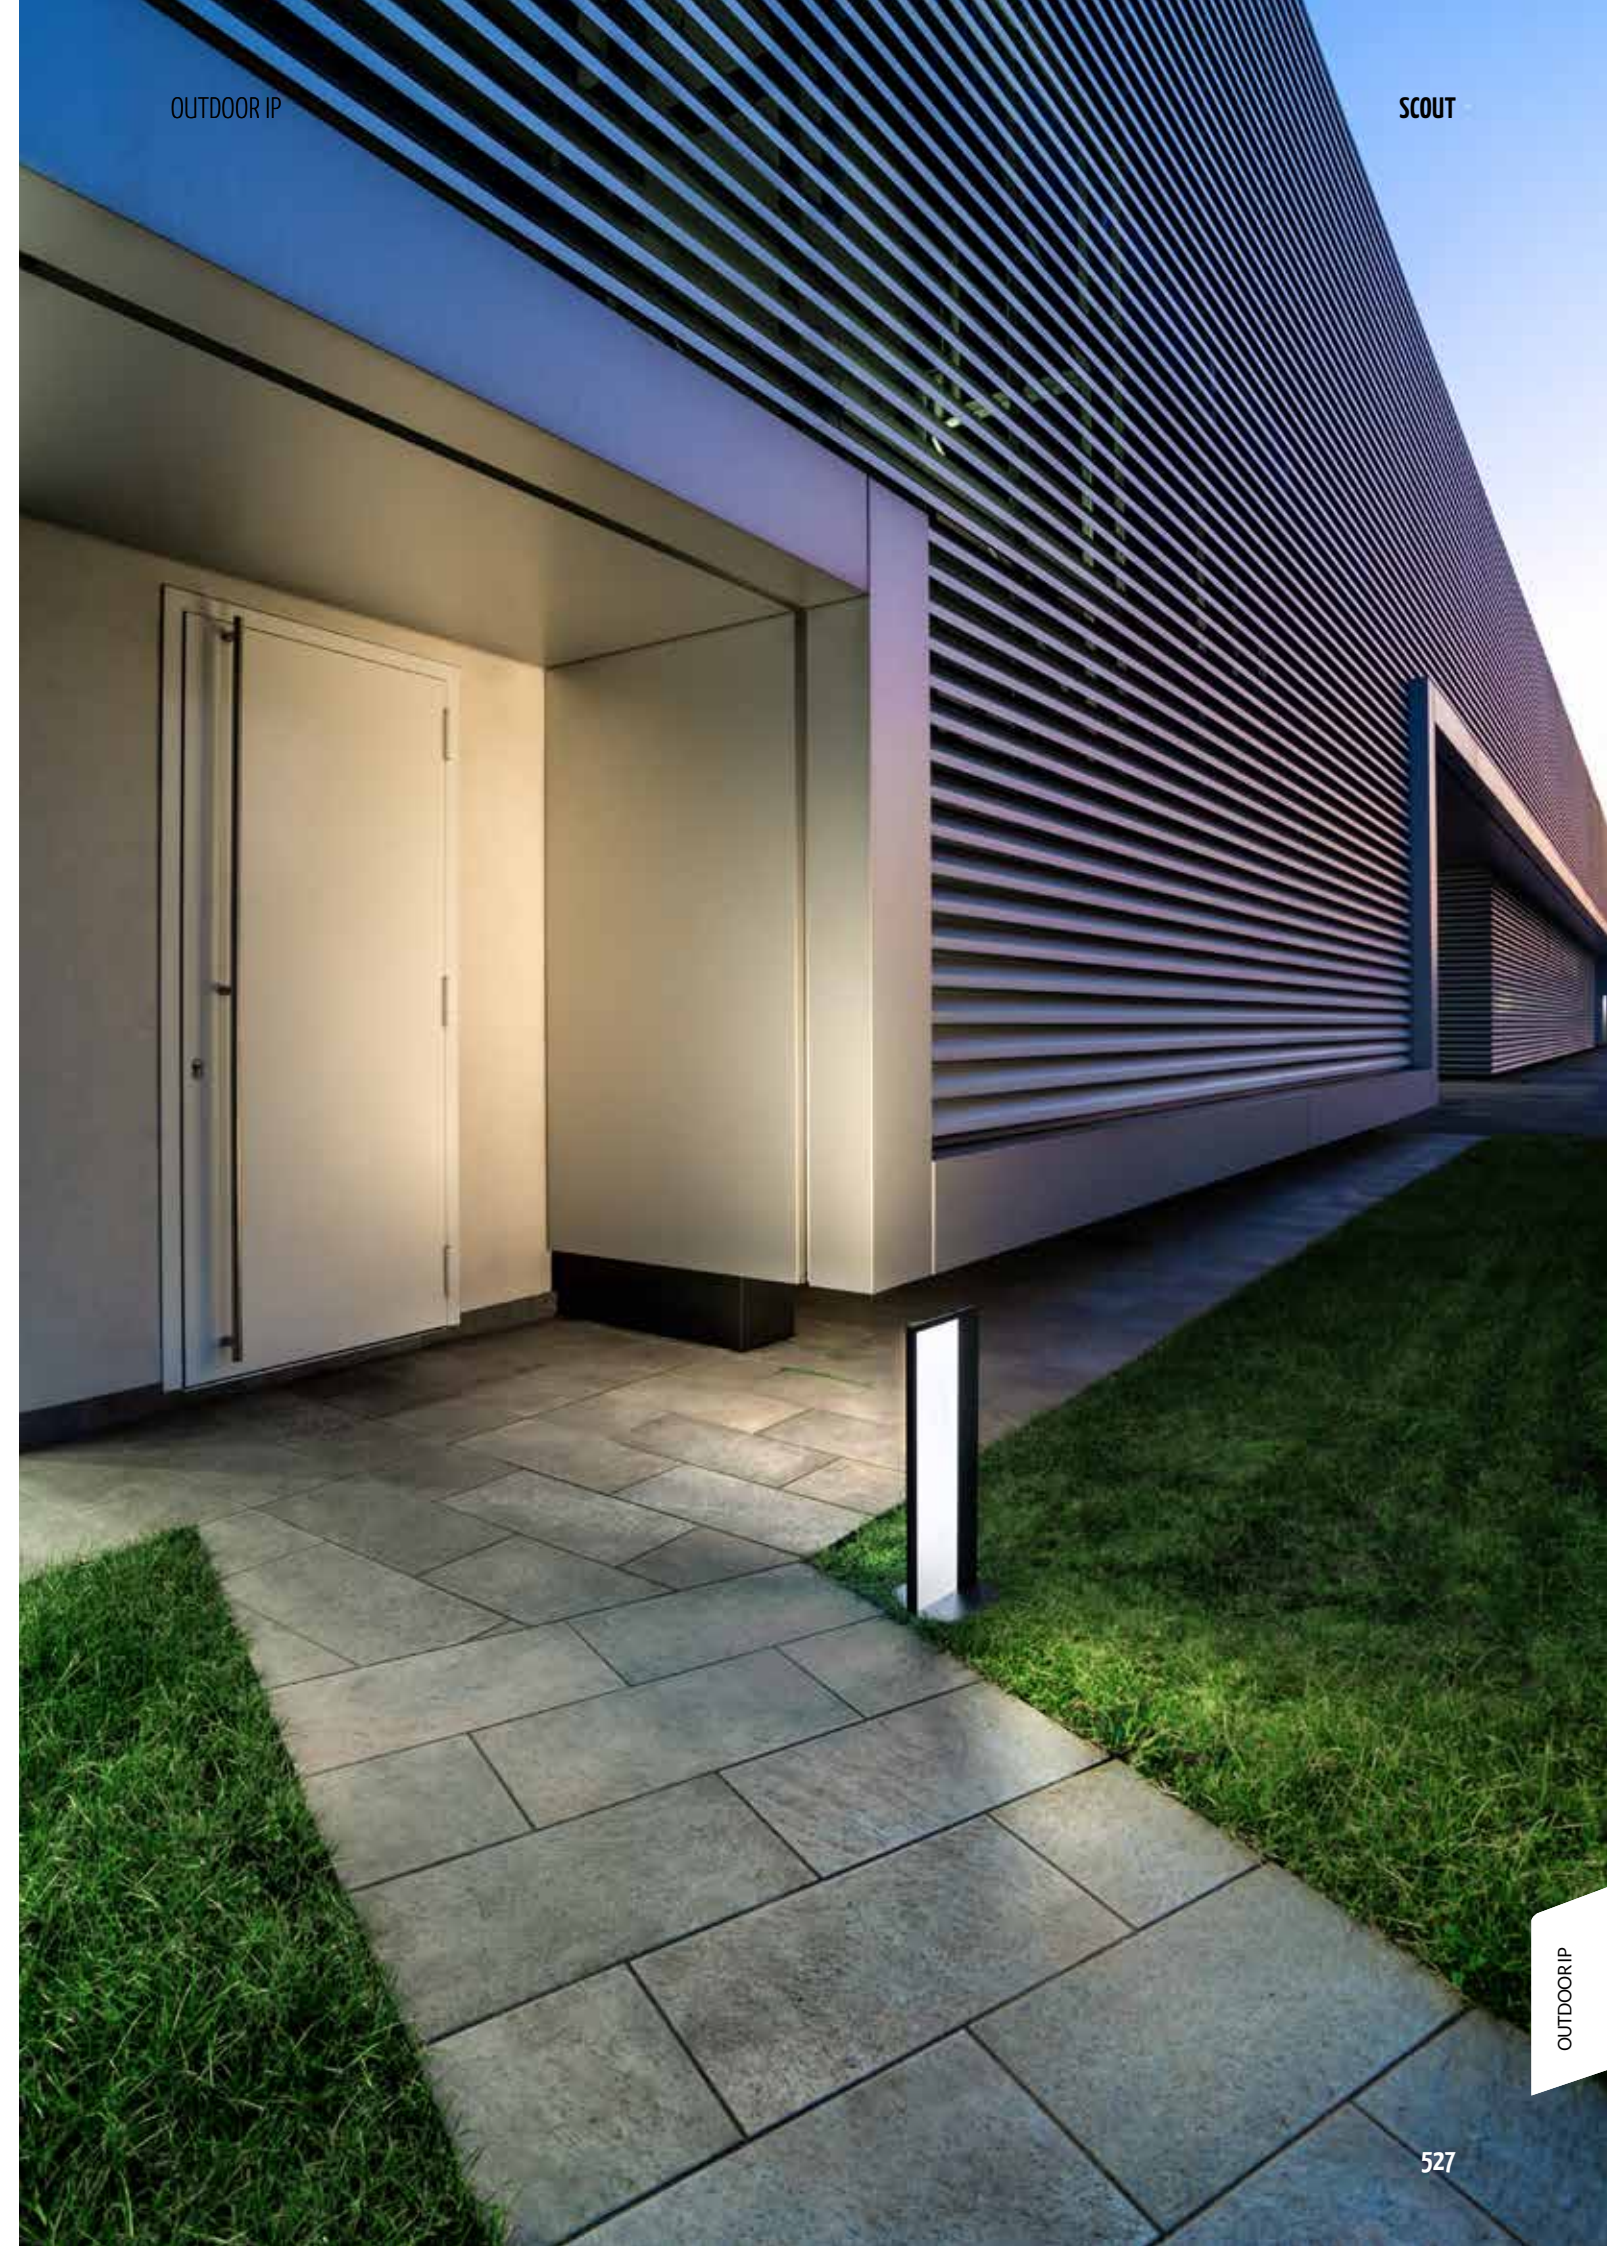


SCOUT

OPTIC

LGP (Light Guide Panel) diffuser in backlight plexiglass with microncisions designed to ensure uniform emission of light outwards.

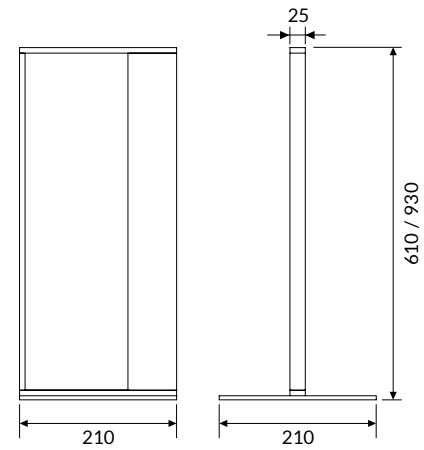

IP 66 A+

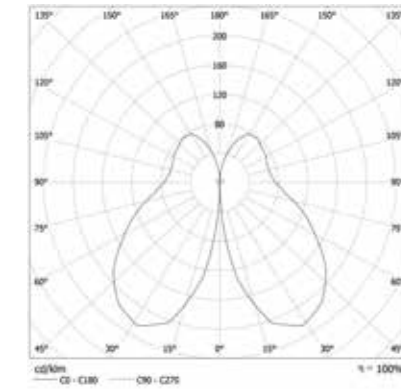


COLOUR TEMPERATURE 3000K

COD	💡	lm	mm
91PC9L366	9W	180	610
91PC13L366	13W	260	930

SCOUT WALL

OPTIC

LGP (Light Guide Panel) diffuser in backlight plexiglass with microncisions designed to ensure uniform emission of light outwards.

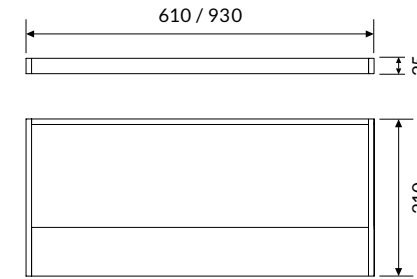

COLOUR TEMPERATURE 3000K


COD	💡	lm	mm
91PC9L3LW66	9W	180	610
91PC13L3LW66	13W	260	930

SCOUT WALL SPOT

OPTIC

Spot with 35° beam angle.

Remote driver supplied with the fixture.

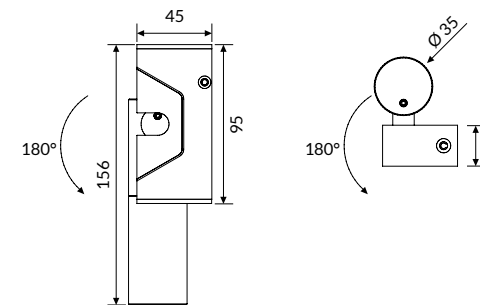


COLOUR TEMPERATURE 3000K


COD	💡	lm
91AA3L3W66	3W	187



IP 66 A+

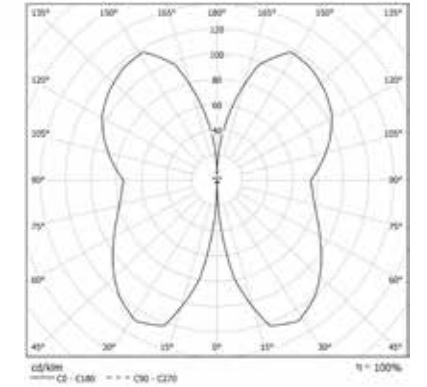


IP 66 A+

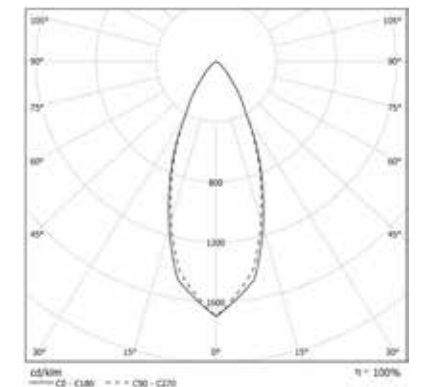


SCOUT SPOT

OPTIC

Spot with 35° beam angle.

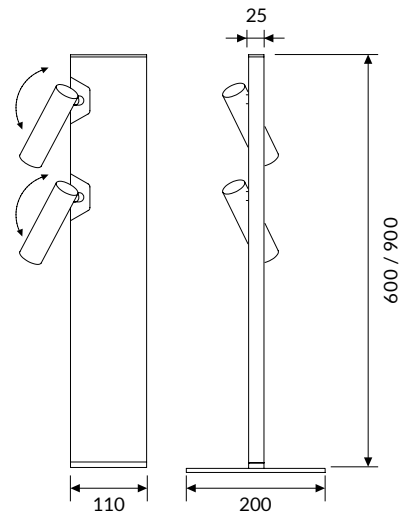

IP 66 A*

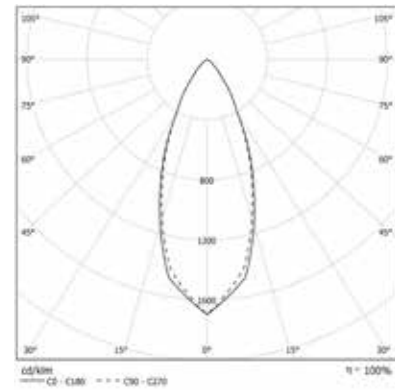


COLOUR TEMPERATURE 3000K

COD	💡	lm	mm
91AA23L366	2x3W	374	600
91AA23L3L66	2x3W	374	900


SCOUT SPOT DOUBLE EMISSION

OPTIC


Spot with 35° beam angle and asymmetrical back emission ground oriented.

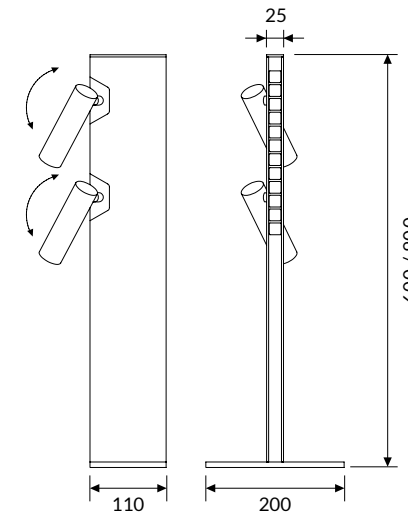

IP 66 A*

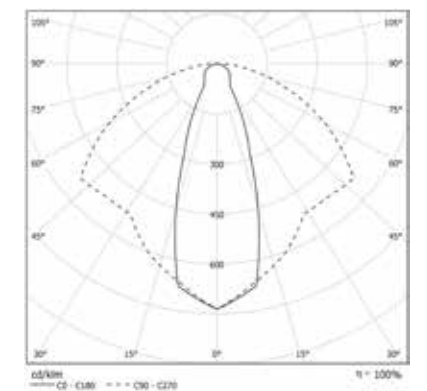

Rear emission

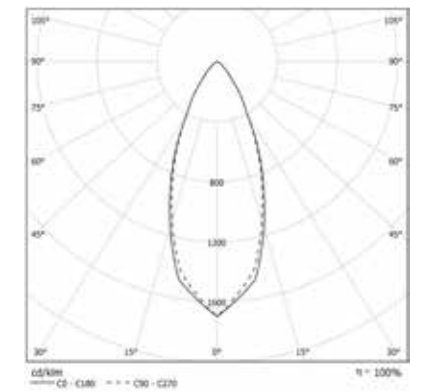

Spot emission

COLOUR TEMPERATURE 3000K

COD	💡	lm	mm
91DI3S23L366	3W + 2x3W	60 + 374	600
91DI5S23L366	5W + 2x3W	100 + 374	900

Accessories

LENS FOR SPOT



91AALPC20
Lens 20° beam angle.



91AALPC45
Lens 45° beam angle.

