

SL787+ PL

design by PERFORMANCE IN LIGHTING



Finstral Customer Center - Gochsheim - Germany



● GR-EV1 / Anodised grey / Matt

Suspended, LED luminaire for indoor, comprising:

- Extruded anodised aluminium housing
- Die-cast aluminium end caps, painted
- Opal PMMA diffuser for optimal light diffusion and uniformity
- Streamlined, simple design with flush end caps
- High-quality workmanship of profile connections for a perfect look
- High economic efficiency thanks to luminaire efficiencies of up to 159 lm/W
- UGR <19 for all luminosities
- Through-wiring designed


- Simple and convenient lighting installation
- Interchangeable lighting inserts
- Direct light distribution
- Colour rendering index Ra > 80
- Colour tolerance according to MacAdam ≤ 3 SDCM
- Complete with steel suspension cable (1.5 m), transparent power cable and canopy
- Many other luminaire designs and strip light configurations are available at www.light-performer.com




pg 73
SL787+ RE



S/A



OP - OPAL

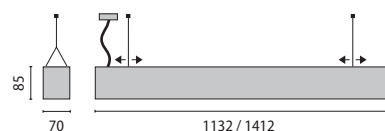

SL787+ PL OP

IK05 0.70J xx3 - 650°

WATTAGE	CLASS	DIN EN 12464-1	CRI	KELVIN	COS φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	LENGTH	PART NUMBER
Power LED 220-240 V 50/60 Hz															
12 W	I	-	-	80 4000	✓	S/A	2 x 48°/51°	2150 lm	1910 lm	80	10	50000 h	●	1412 mm	3109608
12 W	I	-	-	80 3000	✓	S/A	2 x 48°/51°	2040 lm	1820 lm	80	10	50000 h	●	1412 mm	3109607
10 W	I	-	-	80 4000	✓	S/A	2 x 48°/51°	1720 lm	1530 lm	80	10	50000 h	●	1132 mm	3109606
10 W	I	-	-	80 3000	✓	S/A	2 x 48°/51°	1630 lm	1450 lm	80	10	50000 h	●	1132 mm	3109605



CONFIGURATOR LIGHT-PERFORMER®
www.light-performer.com