

SPIDER+ POST A/EW



Part number	3109056
Lampholder:	LED
Light Source:	LED
Wattage:	37/51 W
Finish:	BK-81 / Black / Textured
Insulation class:	II
Degree of protection:	IP66
IK-J-xxIP:	IK06 1J xx3
CRI:	80
Kelvin:	3000
Power factor:	$\text{COS}\phi \geq 0,9$
Optic:	Asymmetric extra wide reflector
Lightsource lumen output:	6677 lm
Luminaire lumen output:	5754 lm
L:	L70
B:	B10
Lifetime:	70000 h
Ta MIN luminaire:	-20°
Ta MAX luminaire:	30°
ULR:	0%
Luminous Intensity Class:	G*6





Description

Photometric data

Technical drawings

Pole-top mounted outdoor luminaire, comprising:

- Die-cast aluminium housing, powder-polyester coated ISO 9227
- Die-cast aluminium pole clamp with polyester powder coating after surface chemical conversion treatment, for \varnothing 60 mm poles
- Extra pure polished aluminium reflector
- Extra-clear, tempered, flat glass diffuser, screen-printed inside
- Diffuser permanently sealed to the housing through a high-temperature resistant silicone
- Anti-ageing silicone gasket
- IP66 quick connector made in PA66 with brass contacts for cables \varnothing 6.5 - \varnothing 10 mm, complete with cable. It allows connection to mains without opening the luminaire
- Luminaire designed to operate with two predetermined power levels that can be selected by the user acting on the specific cable in the quick connector
- Built-in driver
- Stainless steel external screws
- The luminous flux data shown refer to the maximum power operating level
- Pole clamp for \varnothing 76 mm poles is available as an accessory
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

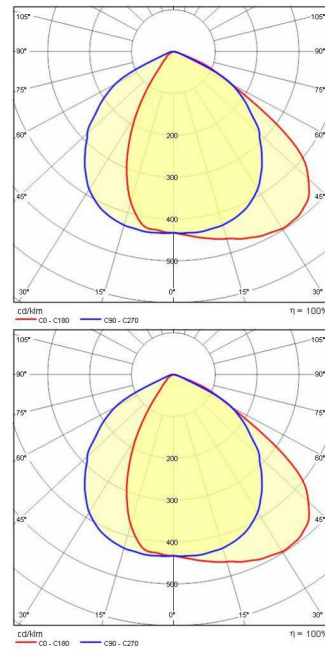

OPTIONAL ACCESSORIES

SPIDER+ POST



3109437

Painted die-cast aluminium pole-mounting joint for pole Ø 76 mm

Black