


# SPIDER+ POST A/EW



<b>Part number</b>	3109057
<b>Lampholder:</b>	LED
<b>Light Source:</b>	LED
<b>Wattage:</b>	37/51 W
<b>Finish:</b>	BK-81 / Black / Textured
<b>Insulation class:</b>	II
<b>Degree of protection:</b>	IP66
<b>IK-J-xxIP:</b>	IK06 1J xx3
<b>CRI:</b>	80
<b>Kelvin:</b>	4000
<b>Power factor:</b>	$\text{COS}\phi \geq 0,9$
<b>Optic:</b>	Asymmetric extra wide reflector
<b>Lightsource lumen output:</b>	6967 lm
<b>Luminaire lumen output:</b>	6005 lm
<b>L:</b>	L70
<b>B:</b>	B10
<b>Lifetime:</b>	70000 h
<b>Ta MIN luminaire:</b>	-20°
<b>Ta MAX luminaire:</b>	30°
<b>ULR:</b>	0%
<b>Luminous Intensity Class:</b>	G*6





Description

Photometric data

Technical drawings

Pole-top mounted outdoor luminaire, comprising:

- Die-cast aluminium housing, powder-polyester coated ISO 9227
- Die-cast aluminium pole clamp with polyester powder coating after surface chemical conversion treatment, for  $\varnothing$  60 mm poles
- Extra pure polished aluminium reflector
- Extra-clear, tempered, flat glass diffuser, screen-printed inside
- Diffuser permanently sealed to the housing through a high-temperature resistant silicone
- Anti-ageing silicone gasket
- IP66 quick connector made in PA66 with brass contacts for cables  $\varnothing$  6.5 -  $\varnothing$  10 mm, complete with cable. It allows connection to mains without opening the luminaire
- Luminaire designed to operate with two predetermined power levels that can be selected by the user acting on the specific cable in the quick connector
- Built-in driver
- Stainless steel external screws
- The luminous flux data shown refer to the maximum power operating level
- Pole clamp for  $\varnothing$  76 mm poles is available as an accessory
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

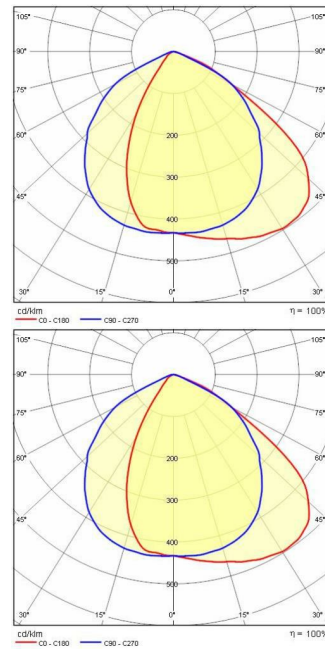

## OPTIONAL ACCESSORIES

### SPIDER+ POST



3109437

Painted die-cast aluminium pole-mounting joint for pole Ø 76 mm

Black