Arm-mounted luminaire STE 111

112349000-00039395



light source

work equipment

connected load Power consumption glare control System of protection class of protection technology operation luminaire body lamp cover tubular sections balance of articulation joints weight (net) mains lead

Fastening

Waldmann W

ENGINEER OF LIGHT.


1 x compact fluorescent lamp TC-SEL 11W/840 2G7 colour temperature neutral white Energy efficiency category A electronic ballast Energy efficiency index (EEI): A3 220-240V ; 50Hz approx. 11.3 W prismatic screen . IP 20 I switchable switch plastic, light grey acrylic, white opal steel tube, painted, light grey friction approx. 1.4 kg approx. 1.5 m; mains plug CEE 7/VII screw-down flange, table clamp (accessory), wall bracket (accessory)

CE



CEE 7/VII

illuminance

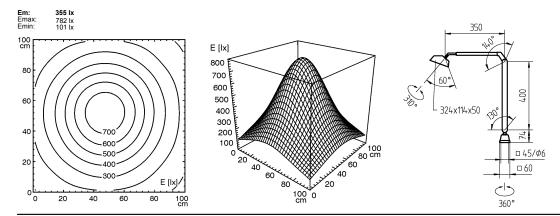

Errors and technical changes excepted. Images can vary from original. Photometric and electrical data may vary due to component tolerances.