

STEEL SQUARE

design by PERFORMANCE IN LIGHTING






● INOX / Stainless steel / Glossy

Series of class I reduced depth in-ground luminaires, comprising:

- Black painted anodised die-cast aluminium housing
- Extra-clear tempered flat glass cover thickness 12 mm
- Optic compartment separate from the power compartment for better heat control
- Anti-ageing silicone gasket
- Precision-cast stainless steel trim
- Mains connection device WATER STOP
- Built-in driver
- Stainless steel locking screws
- Recessed box to be ordered separately
- Technopolymer recessed box allows water drainage through the WATER DRAIN system. The recessed rough-in kit is also equipped with a removable cover, with two bubble levels inside for quick installation
- LED extruded profiles may be oriented independently (+/- 10°)
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08



Restaurant burg landshut - Bernkastel-Kues - Germany

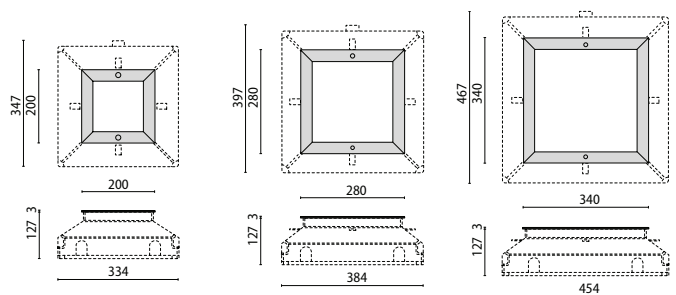

STEEL SQUARE 20


STEEL SQUARE 28

STEEL SQUARE 34

STEEL SQUARE 20 - 6 LED I 8°

IK10 20J xx9


WATTAGE	CLASS	CEC	CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
6,6 W	I	-	80	3000	✓	C/I	8°	510 lm	346 lm	80	10	50000 h	●	301463



STEEL SQUARE 20 - 6 LED ELL 10°x45°

IK10 20J xx9


WATTAGE	CLASS	CEC	CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
6,6 W	I	-	80	3000	✓	ELL	10°x45°	510 lm	278 lm	80	10	50000 h	●	301469



STEEL SQUARE 28 - 18 LED I 8°

IK10 20J xx9


WATTAGE	CLASS	CEC	CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
20 W	I	-	80	3000	✓	C/I	8°	1530 lm	1056 lm	80	10	50000 h	●	301484



STEEL SQUARE 28 - 18 LED ELL 10°x45°

IK10 20J xx9


WATTAGE	CLASS	CEC	CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
20 W	I	-	80	3000	✓	ELL	10°x45°	1530 lm	852 lm	80	10	50000 h	●	301490



STEEL SQUARE 34 - 24 LED I 8°

IK10 20J xx9


WATTAGE	CLASS	CEC	CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
26 W	I	-	80	3000	✓	C/I	8°	2040 lm	1357 lm	80	10	50000 h	●	301503



STEEL SQUARE 34 - 24 LED ELL 10°x45°

IK10 20J xx9

WATTAGE	CLASS	CEC	CRI	KELVIN	COS Ø ≥ 0.9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
26 W	I	-	80	3000	✓	ELL	10°x45°	2040 lm	1087 lm	80	10	50000 h	●	301509



OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
STEEL SQUARE		
Steel Recessed Fixing Kit, Square 20		310369
Steel Recessed Fixing Kit, Square 28		310374
Steel Recessed Fixing Kit, Square 34		310379



310369



310374



310379



Complete unit

1A+1B = please order 2 codes

	components
A	gear body
B	recessed fixing kit