



light source

work equipment
connected load
Power consumption
luminous flux
luminous efficacy
colour temperature
color rendering index (CRI)
chromaticity tolerance LED
glare control
System of protection
class of protection
operation
luminaire body

lamp cover
tubular sections

balance of articulation joints
weight (net)
mains lead

Fastening

LED

Energy efficiency category A/A+/A++
electronic plug-in transformer
100-240 V; 50/60 Hz
approx. 14 W
approx. 650 lm
approx. 46 lm/W
neutral white, approx. 4000 K
≥ 80
4 SDCM
conical prismatic screen
IP20
II
multi-function switch
sectional aluminium, anodised, aluminium coloured
anodised
acrylic clear
tubular aluminium section, anodized, aluminium coloured
anodised
spring
approx. 1.5 kg
approx. 3 m; mains plug
BS 1363
CEE 7/XVI
NEMA 5-15P
screw-down flange, table clamp (accessory), wall bracket
(accessory)



BS 1363



CEE 7/XVI




NEMA 5-15P

illuminance

distance: 50 cm

Em: 563 lx
E_{max}: 1569 lx
E_{min}: 83 lx

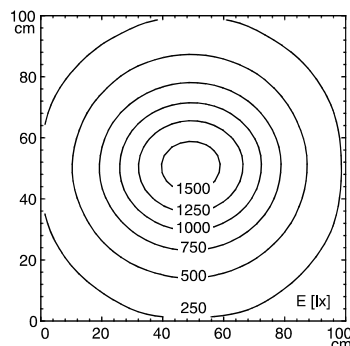

luminous intensity

