



light source

work equipment
connected load
Power consumption
luminous flux
luminous efficacy
Illuminance efficiency factor
colour temperature
color rendering index (CRI)
chromaticity tolerance LED
glare control
class of protection
luminaire body
lamp cover
tubular sections
balance of articulation joints
weight (net)
mains lead

LED

Energy efficiency category A/A+/A++
electronic plug-in transformer
100-240 V; 50/60 Hz
approx. 14 W
approx. 650 lm
approx. 46 lm/W
40 lx/W
neutral white, approx. 4000 K
≥ 80
4 SDCM
conical prismatic screen
II
sectional aluminium, painted, white
acrylic clear
tubular aluminium section, painted,
spring
approx. 1.5 kg
approx. 3 m; mains plug
BS 1363
CEE 7/XVI
NEMA 1-15P
screw-down flange, table clamp (accessory), wall bracket
(accessory)

Fastening



BS 1363



CEE 7/XVI




NEMA 1-15P

illuminance

distance: 50 cm

Em: 563 lx
Emax: 1569 lx
Emin: 83 lx

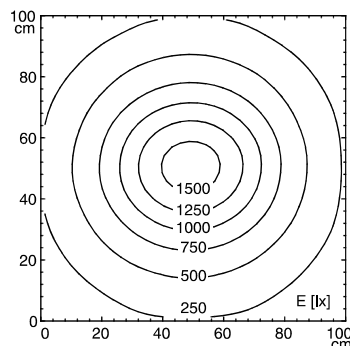

luminous intensity

