



light source

work equipment
connected load
Power consumption
luminous flux
luminous efficacy
colour temperature
color rendering index (CRI)
System of protection
class of protection
technology
operation
luminaire body

lamp cover
weight (net)
mains lead

design

Fastening
special features

LED

Energy efficiency category A/A+/A++
electronic plug-in transformer
100-240 V; 50/60 Hz
approx. 14 W
approx. 600 lm
approx. 42 lm/W
neutral white, approx. 4000 K
≥ 80
IP20
II
continuously dimmable
push button
sectional aluminium, anodised, aluminium coloured
anodised
polycarbonate, white opal
approx. 0.9 kg
approx. 4,0 m; mains plug
BS 1363
CEE 7/XVI
NEMA 1-15P
mounted version
screw-down bracket; horizontal
Ra (luminaire) ca. 90, pivot arm



BS 1363



CEE 7/XVI




NEMA 1-15P

illuminance

distance: 50 cm

Em: 361 lx
Emax: 816 lx
Emin: 105 lx

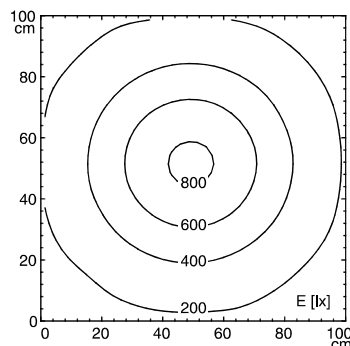

luminous intensity

