



light source

work equipment
connected load
Power consumption
luminous flux
luminous efficacy
colour temperature
color rendering index (CRI)
System of protection
class of protection
operation
luminaire body

lamp cover
tubular sections
balance of articulation joints
weight (net)
mains lead

Fastening

special features

LED

Energy efficiency category A/A+/A++
electronic transformer
100-240 V; 50/60 Hz
approx. 24 W
approx. 1200 lm
approx. 50 lm/W
neutral white, approx. 4000 K
≥ 80
IP20
I
multi-function switch
sectional aluminium, anodised, aluminium coloured
anodised
polycarbonate, white opal
anodized, aluminium coloured anodised
spring
approx. 1.9 kg
approx. 3,4 m; mains plug
CEE 7/II
screw-down flange, table clamp (accessory), wall bracket
(accessory)
Ra (luminaire) ca. 90




CEE 7/II

illuminance

distance: 50 cm

Em: 725 lx
Emax: 1578 lx
Emin: 219 lx

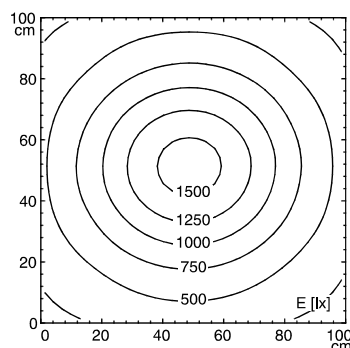

luminous intensity

