



light source

work equipment
connected load
Power consumption
luminous flux
luminous efficacy
colour temperature
color rendering index (CRI)
glare control
System of protection
class of protection
technology
operation
luminaire body

weight (net)
mains lead

design
Fastening
special features

LED

Energy efficiency category A/A+/A++

electronic transformer

100-240 V; 50/60 Hz

approx. 34 W

approx. 1950 lm

approx. 57 lm/W

neutral white, approx. 5000 K

>= 80

conical prismatic screen

IP20

I

continuously dimmable

multi-function switch

sectional aluminium, anodised, aluminium coloured
anodised

approx. 1.8 kg

approx. 4,7 m; mains plug

CEE 7/VII

mounted version

screw-down bracket; horizontal

fixed connection




CEE 7/VII

illuminance

distance: 50 cm

Em: 1641 lx
Emax: 4046 lx
Emin: 329 lx

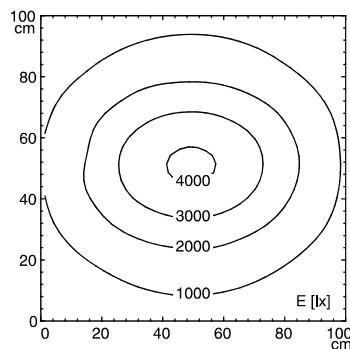

luminous intensity

