





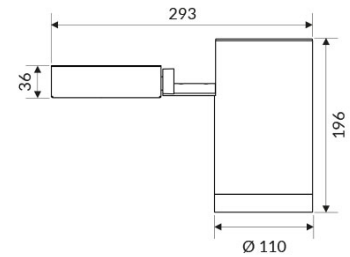


## TERES EXTE COVE HF

Version for installation on ledges and perimeter lighting slots CRI>90

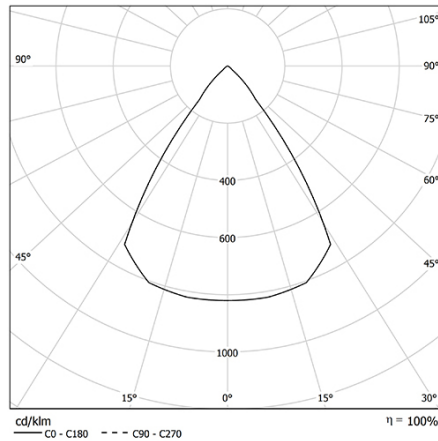

CODE		FLUX	SIZE	CERTIFICATIONS
14VT36K310HFC	36W 10° 3000K	3719lm	110mm	    

### Optics

Internal aluminum reflector.

### Specifications

LED CoB Technology;  
Built-in driver;  
CRI>90;  
McAdams 3;  
Life Time: L80/B10 >50.000h;  
5 years complete warranty;  
Eye safety: RG0/RG1 in accordance with EN62471:2009

### Body

Manufactured from pressure die-cast aluminum with epoxy powder coating.

### Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

### Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97