
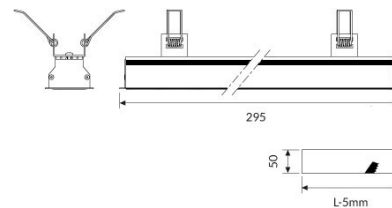



WAVE DISPLAY

High Contrast diffuser UGR <16. Recessed version.

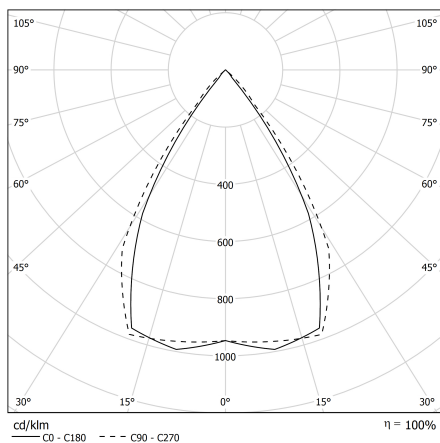

CODE		FLUX	SIZE	CERTIFICATIONS
85DR9DKK4RD	9W 4000K	965lm	295mm	   

Optic

High Contrast diffuser UGR <16. Direct emission

Specifications

Built-in driver
CRI>90
McAdams 3
Life Time: L80/B10 >50.000h
5 years complete warranty
Eye safety: RG0/RG1 in accordance with EN62471:2009

Body

Aluminium body with epoxy powder coating.

Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

D: Standard wiring is 220-240V, DALI dimmable