


CABLE GLANDS WITH DEVICE TO PREVENT ANY UNSCREWING

UNION Series




	A	B	C	SPANNER COUPLER (N/M)		WITH NUT					
				nut	seal	Standard		Heavy duty			
						RAL 7035 grey		RAL 7004 grey			
PG THREAD	PG7	13	3 - 6	15	9,5	2,5	2,5	805.3340	50/600	805.3350	50/600
	PG9	16	4 - 8	19	9,5	4	2,5	805.3341	50/600	805.3351	50/600
	PG11	19	5 - 10	22	10	5,5	5	805.3342	25/500	805.3352	25/500
	PG13,5	21	7 - 12	24	12	6	5	805.3343	25/500	805.3353	25/500
	PG16	23	10 - 14	27	12	6	5,5	805.3344	25/300	805.3354	25/300
	PG21	29	13 - 18	33	14	9	7	805.3345	25/400	805.3355	25/400
	PG29	37,5	18 - 25	42	15	14	10	805.3346	25/350	805.3356	25/350
	PG36	47,5	22 - 32	53	17,5	15	12,5	805.3347	10/140	805.3357	10/140
	PG42	54,5	30 - 38	60	19	15	12,5	805.3348	10/100	805.3358	10/100
	PG48	60	34 - 44	68	20	15	12,5	805.3349	10/100	805.3359	10/100
METRIC THREAD	M12x1.5	12	3 - 6	15	9,5	2,5	2,5	805.5412	50/600	805.5512	50/600
	M16x1.5	16	4 - 8	19	9,5	4	2,5	805.5416	50/600	805.5516	50/600
	M20x1.5	20	7 - 12	24	12	6	5	805.5420	25/500	805.5520	25/500
	M25x1.5	25	13 - 18	33	14	9	5,5	805.5425	25/400	805.5525	25/400
	M32x1.5	32	18 - 25	42	15	14	7	805.5432	25/350	805.5532	25/350
	M40x1.5	40	22 - 32	53	17,5	15	11,5	805.5440	10/140	805.5540	10/140
	M50x1.5	50	30 - 38	60	19	15	11,5	805.5450	10/100	805.5550	10/100
GAS THREAD	M63x1.5	63	34 - 44	68	14	15	11,5	805.5463	10/100	805.5563	10/100
	1/4"	13	3 - 6	15	9,5	2,5	2,5	805.7340	50/600	805.7350	50/600
	3/8"	16	4 - 8	19	9,5	4	2,5	805.7341	50/600	805.7351	50/600
	1/2"	21	7 - 12	24	12	6	5	805.7343	25/500	805.7353	25/500
	5/8"	23	10 - 14	27	12	6	5,5	805.7344	25/300	805.7354	25/300
	3/4"	29	13 - 18	33	14	9	7	805.7345	25/400	805.7355	25/400
	1"	37,5	18 - 25	42	15	14	10	805.7346	25/350	805.7356	25/350
	1.1/8"	37,5	18 - 25	42	15	14	10	805.7347	10/140	805.7357	10/140
	1.1/2"	47,5	22 - 32	53	17,5	15	12,5	805.7348	10/140	805.7358	10/140
	2"	60	34 - 44	68	20	15	12,5	805.7349	10/100	805.7359	10/100

WITHOUT NUT		WITH DIAPHRAM AND NUT		WITH DIAPHRAM WITHOUT NUT		LOCK-NUTS		SEALS	
Standard RAL 7035 grey		Standard RAL 7035 grey		Standard RAL 7035 grey		Standard RAL 7035 grey		Heavy duty RAL 7004 grey	
805.3340.0	50/600	805.3340.1	50/600	805.3340.2	50/600	805.3360	100/1000	805.3370	100/1000
805.3341.0	50/600	805.3341.1	50/600	805.3341.2	50/600	805.3361	100/1000	805.3371	100/1000
805.3342.0	25/500	805.3342.1	25/500	805.3342.2	25/500	805.3362	100/1000	805.3372	100/1000
805.3343.0	25/500	805.3343.1	25/500	805.3343.2	25/500	805.3363	100/1000	805.3373	100/1000
805.3344.0	25/300	805.3344.1	25/300	805.3344.2	25/300	805.3364	100/1000	805.3374	100/1000
805.3345.0	25/400	805.3345.1	25/400	805.3345.2	25/400	805.3365	100/1000	805.3375	100/1000
805.3346.0	25/350	805.3346.1	25/350	805.3346.2	25/350	805.3366	50/500	805.3376	50/500
805.3347.0	10/140	805.3347.1	10/140	805.3347.2	10/140	805.3367	50/500	805.3377	50/500
805.3348.0	10/100	805.3348.1	10/100	805.3348.2	10/100	805.3368	50/500	805.3378	50/500
805.3349.0	10/100	805.3349.1	10/100	805.3349.2	10/100	805.3369	50/500	805.3379	50/500
805.5412.0	50/600	805.5412.1	50/600	805.5412.2	50/600	805.5612	100/1000	805.5712	100/1000
805.5416.0	50/600	805.5416.1	50/600	805.5416.2	50/600	805.5616	100/1000	805.5716	100/1000
805.5420.0	25/500	805.5420.1	25/500	805.5420.2	25/500	805.5620	100/1000	805.5720	100/1000
805.5425.0	25/400	805.5425.1	25/400	805.5425.2	25/400	805.5625	100/1000	805.5725	100/1000
805.5432.0	25/350	805.5432.1	25/350	805.5432.2	25/350	805.5632	50/500	805.5732	50/500
805.5440.0	10/140	805.5440.1	10/140	805.5440.2	10/140	805.5640	50/500	805.5740	50/500
805.5450.0	10/100	805.5450.1	10/100	805.5450.2	10/100	805.5650	50/500	805.5750	50/500
805.5463.0	10/100	805.5463.1	10/100	805.5463.2	10/100	805.5663	50/500	805.5763	50/500

(*) Cable glands are provided without gasket.
 (**) Fixing type A (metric HD).
 - STANDARD version: IP66
 - HEAVY DUTY version IP66 or IP68 (1 bar) if installed with corresponding seal.

Cable gland table: METRIC/PG/GAS

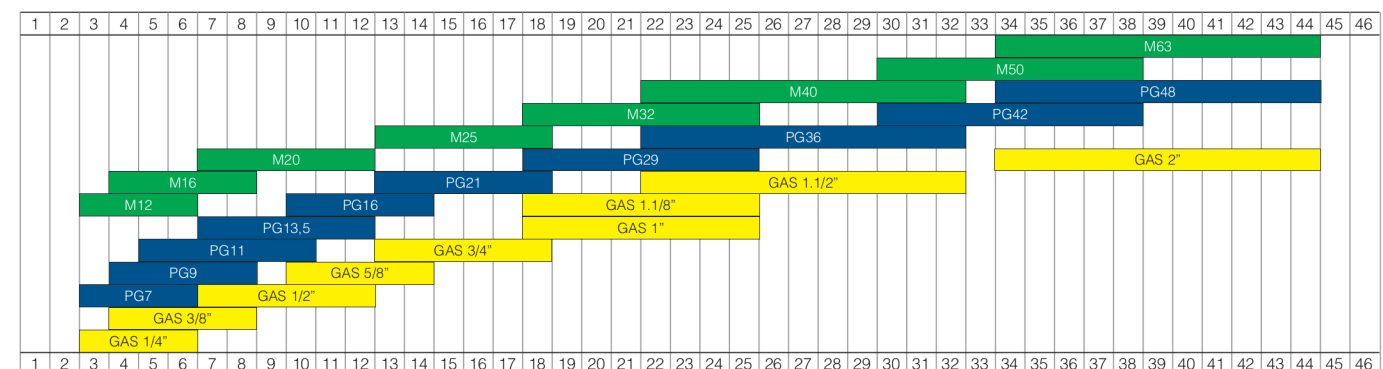

1
2
3
4
ACCESSORIES

