


| | |
|-------------------------------------|---|
| Category (ETIM): | Device mounts |
| Type: | Device mounts IP20 SDGOB LED |
| Order number: | 18510204100 |
| Configuration: | LED, Colour rendering/Light colour CRI \geq 80 / 4000K |
| LED service life: | 50000h L80/B10 |
| Operating device: | Electronic driver (1 pcs.) |
| Mains voltage: | 230V / 50Hz |
| System performance (W): | 39 |
| Luminaire luminous flux (lm): | 6000 |
| Luminaire luminous efficacy (lm/W): | 149 |
| Energy efficiency class: | A++ |
| Ambient temperatures: | 10°C / 40°C |
| Certifications: | IP 20, protection class I, ENEC10 VDE, F, DIN10500/Food, Indoor, CE |
| Colour of the housing: | traffic white RAL 9016 |
| Weight (net) (kg): | 1.9 |
| Dimensions LxWxH/DxH (mm): | 1531 x 55 x 37 |
| mounting method: | Mounting rail system mounting |
| EAN-number: | 4020863325276 |
| Commodity code: | 94051098 |

Quick-fit mounting system Device mounts; Device mount made of galvanised, profiled sheet steel, surface coated with polyester resin enamel. Toolless fastening with two integrated pressure locks. Housing colour traffic white RAL 9016; Direct wide-beam light distribution using individual lens. optic made of PMMA plastic. Continuous optics. Heat-resistant cables including fixed 3-pole rapid installation plug connector with tool-less phase pre-selection and locating finger.

Dimensions LxWxH/DxH (mm): 1531 x 55 x 37
 Configuration: LED, Colour rendering/Light colour CRI \geq 80 / 4000K
 LED service life: 50000h L80/B10
 Luminaire luminous flux (lm): 6000
 Luminaire luminous efficacy (lm/W): 149
 Operating device: Electronic driver (1 pcs.)
 System performance (W): 39
 Energy efficiency class: A++
 Conditions: Suitable for use in ambient temperatures of 10°C to 40°C
 Certifications: IP 20, protection class I, ENEC10 VDE, F, DIN10500/Food, Indoor, CE


Regiolux GmbH
 Type: SDGOB LED 6000 840 ET vw
 Article number: 18510204100
 Product deep link:
<http://www.regiolux.de/de/article/18510204100>
 5 year guarantee after registration on website.

SDGOB LED 6000lm 840 - vw - ET - 18510204100

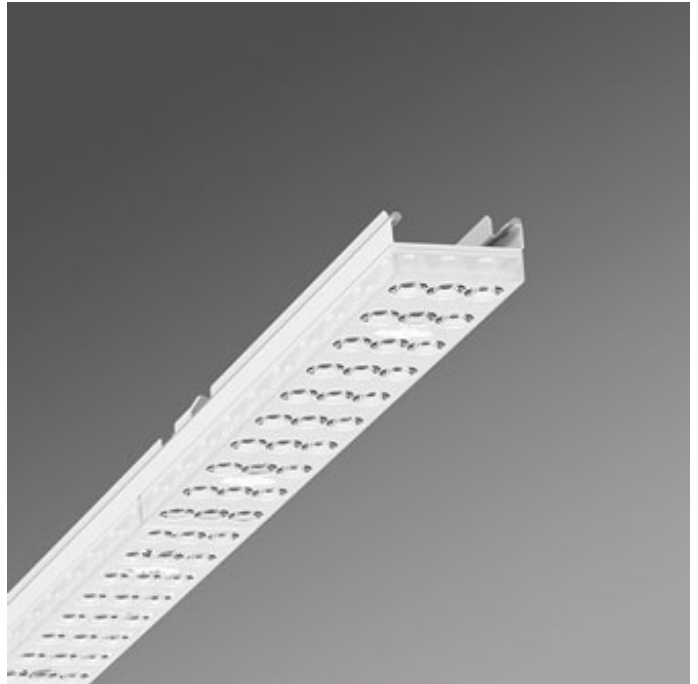


Lighting technology

Individual.Lens.Optic-direct wide distribution
 SDGOB LED 6000 lm 840



η_{LB} 100 %
 lm/W 149
 $\phi \downarrow / \uparrow$ 98 % / 2 %
 UGRq/l 20.3 / 20.7



 Accessories