


<b>Category (ETIM):</b>	Device mounts
<b>Type:</b>	Device mounts IP20 SDGOB LED
<b>Order number:</b>	18510306600
<b>Configuration:</b>	LED, Colour rendering/Light colour CRI $\geq$ 80 / 4000K
<b>LED service life:</b>	50000h L80/B10
<b>Operating device:</b>	Electronic driver DALI (1 pcs.)
<b>Mains voltage:</b>	230V / 50Hz
<b>System performance (W):</b>	56
<b>Luminaire luminous flux (lm):</b>	8000
<b>Luminaire luminous efficacy (lm/W):</b>	139
<b>Energy efficiency class:</b>	A++
<b>Ambient temperatures:</b>	10°C / 35°C
<b>Certifications:</b>	IP 20, protection class I, ENEC10 VDE, F, DIN10500/Food, Indoor, CE
<b>Colour of the housing:</b>	traffic white RAL 9016
<b>Weight (net) (kg):</b>	1.9
<b>Dimensions LxWxH/DxH (mm):</b>	1531 x 55 x 37
<b>mounting method:</b>	Mounting rail system mounting
<b>EAN-number:</b>	4020863325306
<b>Commodity code:</b>	94051098

Quick-fit mounting system Device mounts; Device mount made of galvanised, profiled sheet steel, surface coated with polyester resin enamel. Toolless fastening with two integrated pressure locks. Housing colour traffic white RAL 9016; Direct wide-beam light distribution using individual lens. optic made of PMMA plastic. Continuous optics. Heat-resistant cables including fixed 5-pole rapid installation plug connector with tool-less phase pre-selection and locating finger.

Dimensions LxWxH/DxH (mm): 1531 x 55 x 37  
 Configuration: LED, Colour rendering/Light colour CRI  $\geq$  80 / 4000K  
 LED service life: 50000h L80/B10  
 Luminaire luminous flux (lm): 8000  
 Luminaire luminous efficacy (lm/W): 139  
 Operating device: Electronic driver DALI (1 pcs.)  
 System performance (W): 56  
 Energy efficiency class: A++  
 Conditions: Suitable for use in ambient temperatures of 10°C to 35°C  
 Certifications: IP 20, protection class I, ENEC10 VDE, F, DIN10500/Food, Indoor, CE


Regiolux GmbH  
 Type: SDGOB LED 8000 840 DALI vw  
 Article number: 18510306600  
 Product deep link:  
<http://www.regiolux.de/de/article/18510306600>  
 5 year guarantee after registration on website.

SDGOB LED 8000lm 840 - vw - DALI - 18510306600

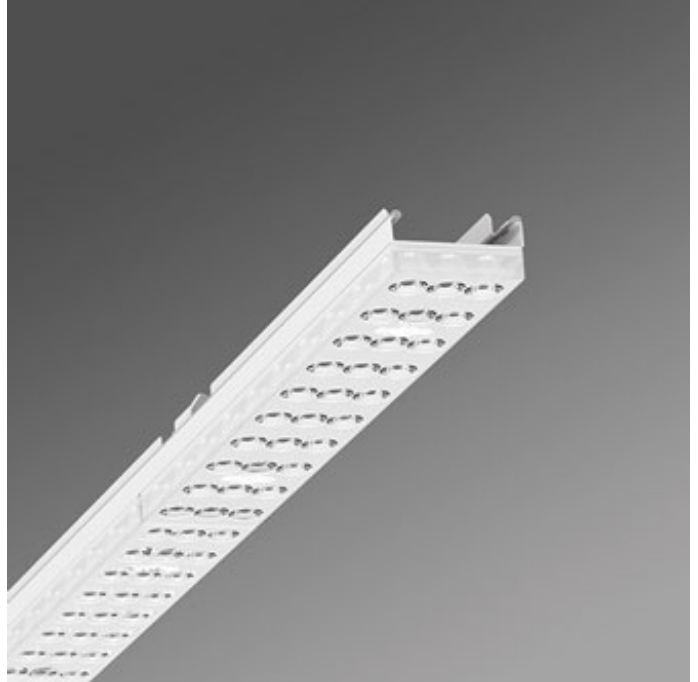


### Lighting technology

Individual.Lens.Optic-direct wide distribution  
 SDGOB LED 8000 lm 840



$\eta_{LB}$  100 %  
 lm/W 139  
 $\phi \downarrow / \uparrow$  98 % / 2 %  
 UGRq/l 21.3 / 21.8



Accessories