



# HALL LED DEEP





Miniature downlight for discrete accent lighting, **designed to express the best of the latest LED technology.** Modern and compact, **HALL LED DEEP** is the ideal fixture for restaurants, meeting rooms and commercial spaces where the light needs to be of high quality yet discrete in appearance.

ID 38









esse-ci

## FEATURES

-  Direct emission
-  UGR <19
-  IP 44
-  IK 02





## LED

-  3000K/4000K
-  >60 lm/W; >103 lm/W
-  CRI >90
-  Eye safety: R60/R61
-  Mac Adams 3
-  L80/B10 >50.000h

## CERTIFICATIONS

-  EEA Conformity
-  Energy efficiency
-  5 years warranty

## ON REQUEST

-  DALI - code D\*
-  Bluetooth - code BT\*
-  Emergency 1 hr - code EM\*  
Emergency 3 hrs - code EM3R\*
-  2700K - code K27\*  
5000K - code K5\*

## SPECIFICATIONS

Built-in driver.  
MINI: polycarbonate lens.  
SMALL: internal aluminum reflector,  
beam angle: 25°- 40°

## BODY

Aluminum with epoxy  
powder coating.

## COLORS

White RAL 9003 matte - code B  
Black RAL 9005 matte - code C8

\*Verificare disponibilità


# HALL LED DEEP <sup>MINI</sup>

IP 44

Polycarbonate lens.

Beam angles: 8° - 12° - 36°.

CUT OFF: > 60°.

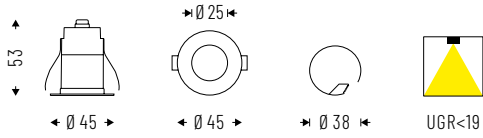

Cod. 4000K	☼	lm	Ø mm
38VM3K48	3W 8°	178	45
38VM3K412	3W 12°	178	45
38VM3K436	3W 36°	178	45

Cod. 3000K	☼	lm	Ø mm
38VM3K38	3W 8°	165	45
38VM3K312	3W 12°	165	45
38VM3K336	3W 36°	165	45

DOWNLIGHT


# HALL LED DEEP <sup>SMALL</sup>

IP 44

Internal reflector in aluminum with

microprismatic glass. Beam angles: 25° - 40°.

CUT OFF > 40°

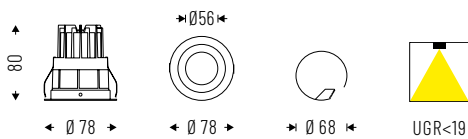

Cod. 4000K	☼	lm	Ø mm
38VM13K425	13W 25°	1339	78
38VM13K440	13W 40°	1339	78

Cod. 3000K	☼	lm	Ø mm
38VM13K325	13W 25°	1205	78
38VM13K340	13W 40°	1205	78