

MULTI+ 30 PC HF

Part number 304169



Description

Wall and ceiling mounted luminaire for indoor and outdoor, comprising:

- Technopolymer housing
- Technopolymer vandal-proof opal diffuser, 960°C glow wire test rated
- Class II
- Anti-ageing custom moulded silicone sealing gasket(s)
- Through-wiring designed
- Stainless steel, anti-tampering locking screws
- Max 20 mm diameter for cable/conduit entry
- Integral, tiltable, self-heat dissipating, Metal-Core SMD LED board (future proof)
- Hyper-frequency (HF) sensor operating at 5.8 Ghz +/- 75 Mhz
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at www.performanceinlighting.com/qr/qr/company/terms-and-conditions

Product data

ETIM Group:	EG000027	ETIM Class:	EC0028g2
-------------	----------	-------------	----------

General information

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	2447	Luminaire lumen output [lm]:	1292
Luminaire wattage [W]:	16 W	Luminous efficacy [lm/W]:	80
CRI:	80	Kelvin:	4000
Colour / Finish:	WH-87 / White / Textured	IP degree of protection:	IP65
IK-J-xxIP:	IK10 20J xx9	Insulation class:	II
Optic:	SYMMETRIC EXTRA-WIDE	Net weight [kg]:	1.189

Mechanical features

Shape:	ROUND > 300 MM	Housing material:	PLASTIC
Diffuser material:	PLASTIC	Glow wire test [°C]:	750 °C
Anti-vandal screws:			

Electrical features

Voltage type:	AC	Power factor / COS Φ :	>0.9
Inrush current [A/ μ s]:	5 / 50		

Installation


Application area:	Outdoor	Mounting type:	Bulkheads
Min. ambient temperature [°C]:	-20	Max. ambient temperature [°C]:	30
Min. distance from lighted object [m]:	0.00		

Light features

MacAdam:	3	Lumen maintenance:	L80B10@60000h
Distribution of light emission:	Direct		

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at www.performanceinlighting.com/qr/qr/company/terms-and-conditions

Photometric data

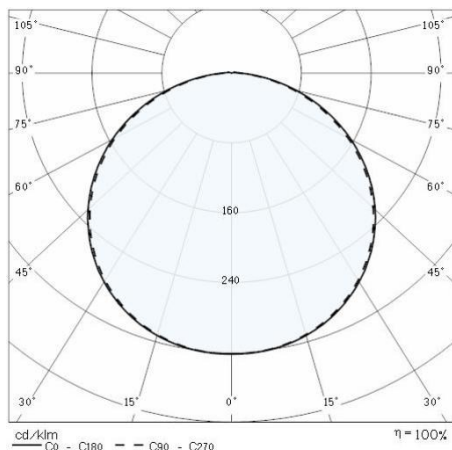

Optional accessories

MULTI+ 30 PC



310514

Tool TORX