


## ORION H B



<b>Part number</b>	3105452
<b>Lampholder:</b>	LED
<b>Light Source:</b>	LED
<b>Wattage:</b>	10 W
<b>Finish:</b>	AN-96 / Anthracite gray / Textured
<b>Insulation class:</b>	I
<b>Degree of protection:</b>	IP65
<b>IK-J-xxIP:</b>	IK06 1J xx3
<b>CRI:</b>	80
<b>Kelvin:</b>	4000
<b>Power factor:</b>	$\text{COS}\phi \geq 0,9$
<b>Optic:</b>	Asymmetric wide reflector
<b>Lightsource lumen output:</b>	1485 lm
<b>Luminaire lumen output:</b>	501 lm
<b>L:</b>	L70
<b>B:</b>	B10
<b>Lifetime:</b>	35000 h
<b>Ta MIN luminaire:</b>	-20°
<b>Ta MAX luminaire:</b>	35°




### Description


Wall-mounted LED luminaire, comprising:

- Painted, die-cast aluminium housing, in compact size
- Microprismatic, flat glass diffuser, screen-printed inside
- Aluminium reflector
- Anti-ageing silicone gasket
- Driver On Board 220-240V 50/60Hz LED module protected against surges up to 500 V
- Stainless steel looking grains
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

### Photometric data

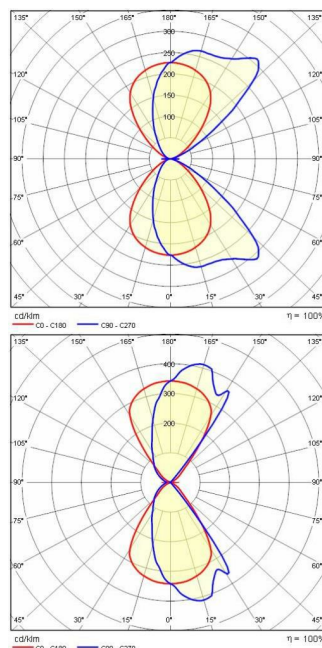


### Technical drawings




## OPTIONAL ACCESSORIES

### ORION




3106290  
Carter ORION H

Black



3106289  
Carter ORION H

White



3106291  
Carter ORION H

Rust